

STANLEY®



- **LED PANELS**
- **COMMERCIAL LIGHTING**
- **EXHAUST FANS**
- **POWER STRIPS & EXTENSIONS CORDS**
- **SURGE & VOLTAGE PROTECTORS**
- **SOLAR LIGHTING**
- **WATER HEATERS**
- **GENERATORS**
- **INDUSTRIAL FANS**

STANLEY®



EXHAUST FANS

EXHAUST FAN

SXIM-XF-01



Built for efficient and continuous ventilation, this exhaust fan is equipped with a DC motor and double ball bearing system that ensures smoother rotation, lower noise, and extended lifespan. The 100% copper wire motor improves electrical conductivity and performance stability, delivering reliable airflow for residential and commercial environments.

FEATURES

- High-efficiency DC motor
- Double ball bearing system for longer durability
- 100% copper wire coil for better conductivity
- Low noise operation
- Energy saving performance
- Stable and continuous airflow
- Easy installation and maintenance

APPLICATION

- Bathrooms
- Kitchens
- Warehouses
- Commercial spaces

CE IP20



PHYSICAL DATA

Finish	White
Protection Level - IP	IP 20
Installation Size	200 X 200 mm
Type of Installation	Wall / Ceiling Mounted
Body Material	PP
Coil Material	100% Copper
Motor Type	DC Motor
Bearing Type	Double Ball Bearing

ELECTRICAL DATA

Input Power	12W
Energy Saving	YES
Operating Voltage	80-245V~
Frequency	50-60 Hz
Air Flow	220 CFM

DIMENSIONS

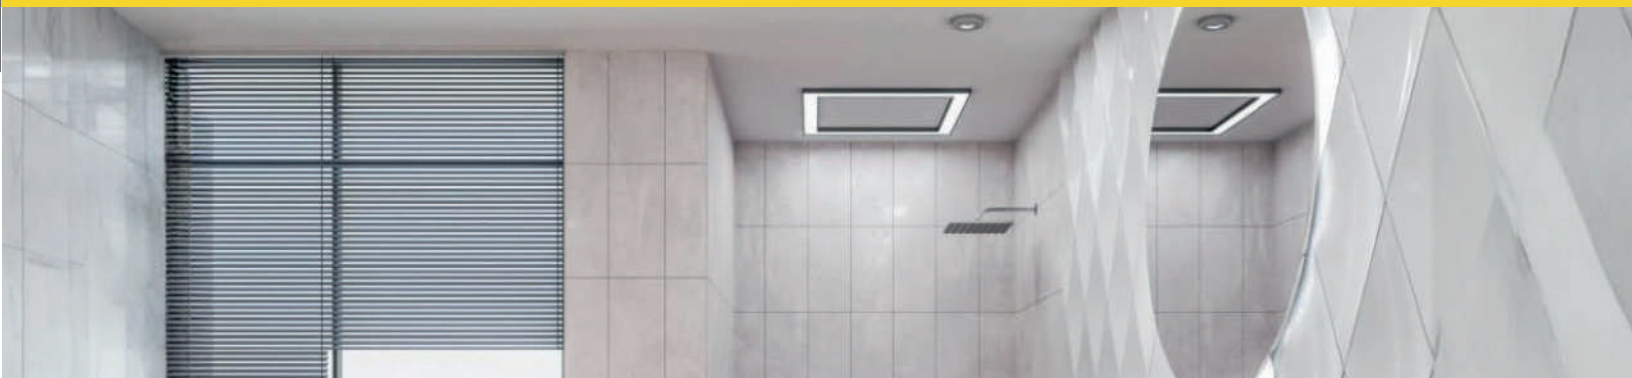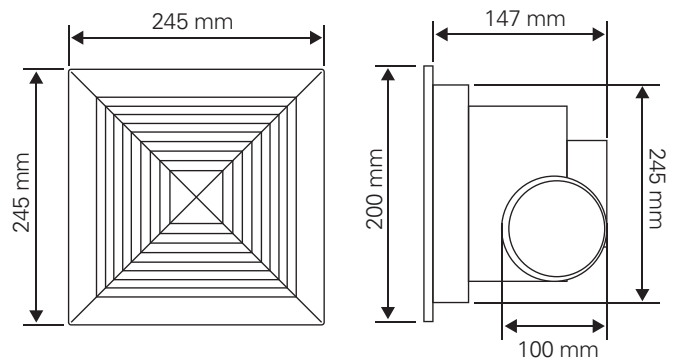

THE MEASURE OF A PRO™

EXHAUST FAN WITH LED CCT LAMP

FATMAX®

SXIM-XF-02



Designed for efficient ventilation, this exhaust fan features a compact structure built with durable ABS panel and PP body. Its energy-saving 12W motor delivers stable high-speed performance at 1200 r/min, ensuring effective air circulation with an airflow capacity of 120 m³/h. Ideal for maintaining fresh and clean environments in residential and commercial spaces.

FEATURES

- Energy-saving 12W motor
- High airflow performance
- Durable ABS front panel
- Resistant PP body structure
- Low noise operation
- Stable high-speed rotation
- Easy installation
- Modern compact design

APPLICATION

- Bathrooms
- Kitchens
- Laundry areas
- Offices
- Storage rooms
- Commercial spaces
- Small warehouses

CE IP20



PHYSICAL DATA

Finish	White
Protection Level - IP	IP 20
Installation Size	200mm x 200mm
Type of Installation	Ceiling Mounted
Panel Material	ABS
Body Material	PP
Motor Type	DC

ELECTRICAL DATA

Input Power	23W
Energy Saving	YES
Operating Voltage	80-245V~
Frequency	50-60 Hz
Air Flow	120 m³/h
Fan Speed	1300 r/min

DIMENSIONS

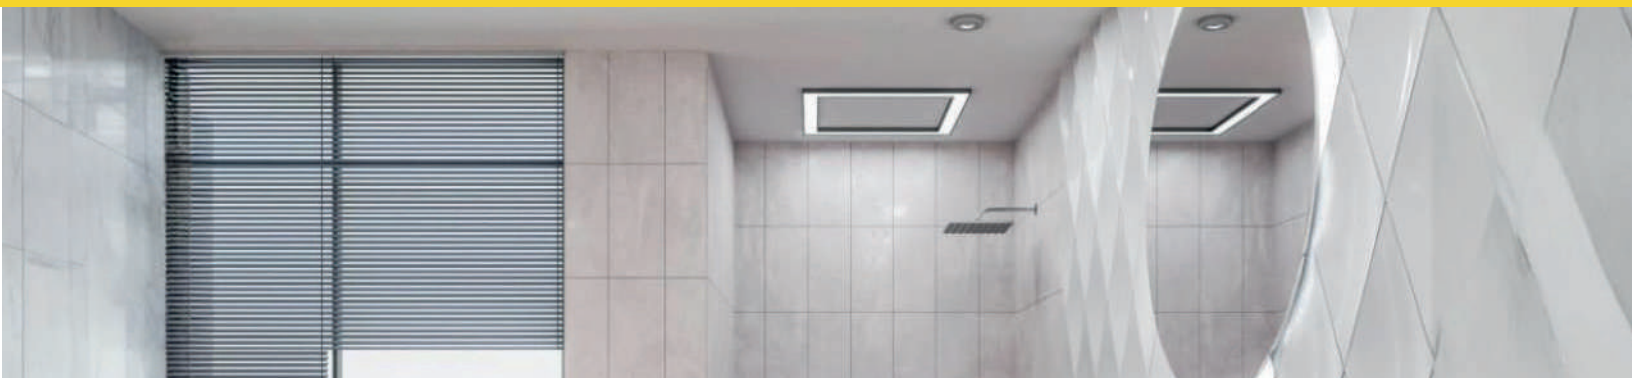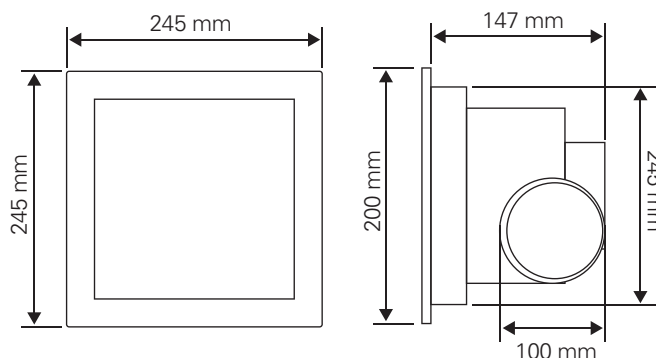

THE MEASURE OF A PRO™

EXHAUST FAN

FATMAX®

SXIM-XF-03



Engineered for high-efficiency ventilation, this exhaust fan is equipped with a DC double ball bearing motor that ensures stable rotation, enhanced durability, and long operational life. Its reinforced structure combines an ABS front panel with an iron motor body, providing strength and resistance for continuous use. With a powerful airflow capacity of 190 m³/h, it is ideal for medium to large enclosed areas.

FEATURES

- High-performance 12W motor
- AC double ball bearing system for longer lifespan
- Aluminium wire motor coil
- Strong iron motor housing
- Durable ABS decorative front panel
- High airflow efficiency (190 m³/h)
- Stable 1250 r/min rotation
- Easy ceiling installation
- Modern square grille design

APPLICATION

- Bathrooms
- Commercial restrooms
- Kitchens
- Offices
- Small warehouses
- Storage rooms
- Utility rooms

CE **IP20**



PHYSICAL DATA

Finish	White
Protection Level - IP	IP 20
Installation Size	200x200mm
Type of Installation	Ceiling Mounted
Panel Material	ABS
Body Material	Iron Motor Housing
Motor Type	AC Double Ball Bearing Motor

ELECTRICAL DATA

Input Power	12W
Energy Saving	YES
Operating Voltage	85-245V~
Frequency	50-60 Hz
Air Flow	200 CFM
Fan Speed	1200 r/min

DIMENSIONS

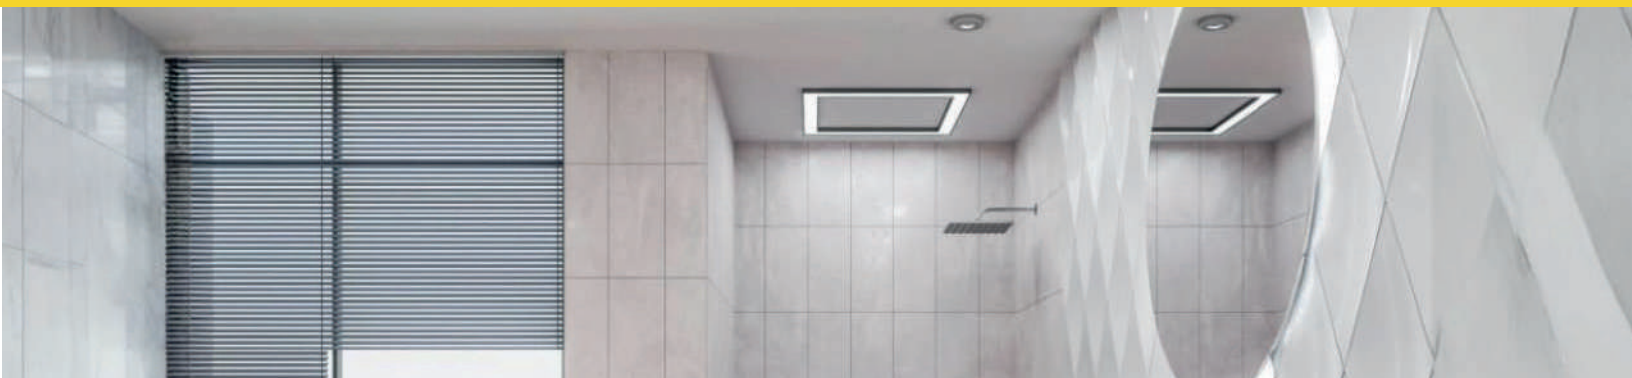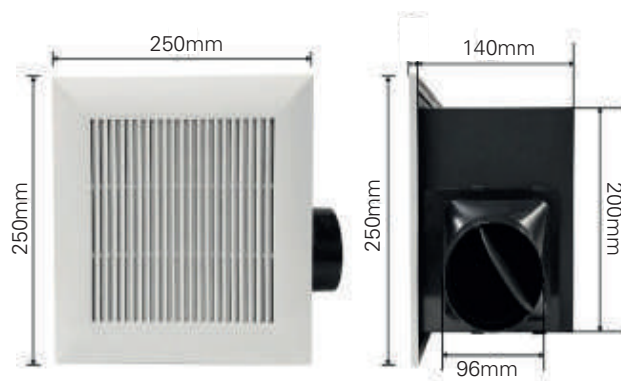

THE MEASURE OF A PRO™

EXHAUST FAN WITH LED LAMP

FATMAX®

SXIM-XF-04



This 8-inch exhaust fan combines high-efficiency ventilation with integrated lighting functionality. Equipped with a DC double ball bearing motor and 100% copper wire coil, it ensures smooth operation, low noise, and extended service life. The built-in 3CCT selectable lighting system allows users to adjust color temperature according to their environment needs, making it ideal for modern residential and commercial applications.

FEATURES

- High-efficiency DC motor
- Double ball bearing system for extended durability
- 100% copper wire coil for superior conductivity
- Wide voltage compatibility (85–245V)
- Integrated 3 CCT lighting selection
- Stable, low-noise performance
- Modern square design

APPLICATION

- Bathrooms
- Kitchens
- Laundry rooms
- Offices
- Commercial spaces

CE IP20



PHYSICAL DATA

Finish	White
Protection Level - IP	IP 20
Dimensions	8" (200mm)
Type of Installation	Ceiling Mounted
Panel Material	ABS
Coil Material	Double Ball Bearing Copper
Motor Type	DC

ELECTRICAL DATA

Input Power	23W
Energy Saving	YES
Operating Voltage	85-245V~
Frequency	50-60 Hz
CCT	3000K, 4000K, 6500K

DIMENSIONS

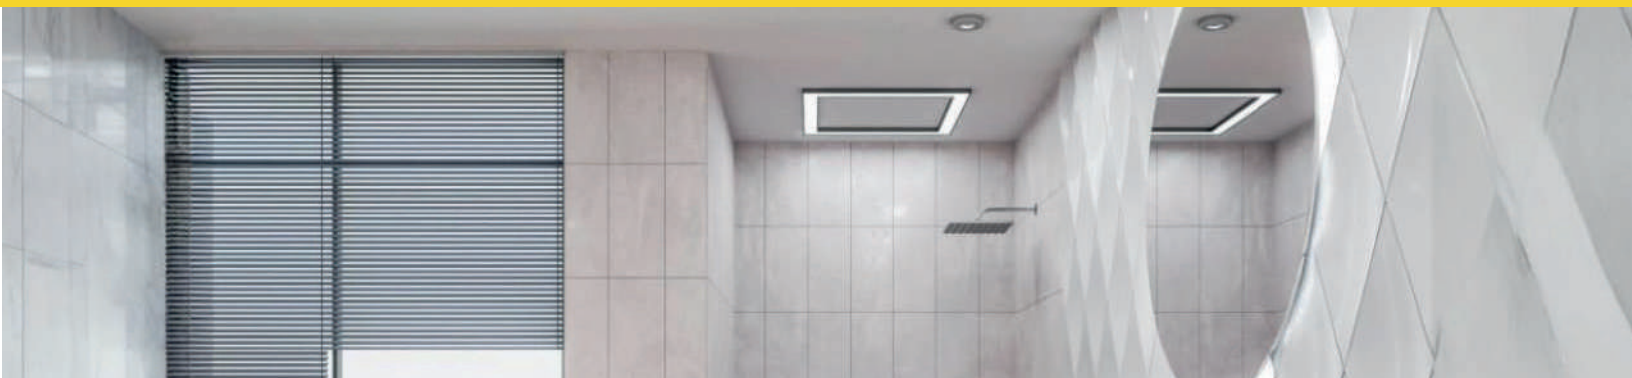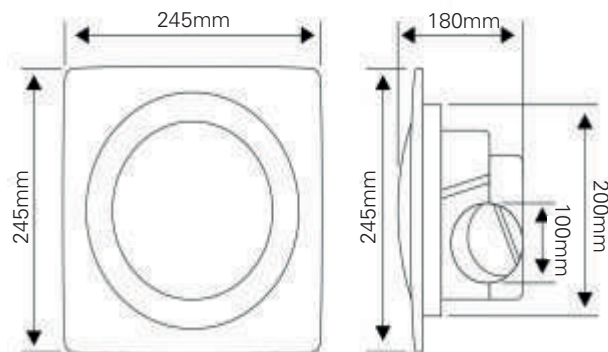

THE MEASURE OF A PRO™

EXHAUST FAN

SXIM-XF-05



Designed for efficient ventilation in compact spaces, this 6-inch exhaust fan is powered by a high-efficiency DC motor with double ball bearing system for smoother rotation and extended lifespan. The 100% copper wire coil ensures superior electrical conductivity, energy efficiency, and stable performance for continuous air extraction.

FEATURES

- High-efficiency DC motor
- Double ball bearing system for durability
- 100% copper wire motor coil
- Energy-saving performance
- Stable and low-noise operation
- Compact square design
- Easy wall or ceiling installation

APPLICATION

- Bathrooms
- Small kitchens
- Laundry areas
- Offices
- Utility rooms
- Storage spaces

CE IP20



PHYSICAL DATA

Finish	White
Protection Level - IP	IP 20
Installation Size	150x150mm
Type of Installation	Ceiling Mounted
Panel Material	ABS
Coil Material	Double Ball Bearing Copper
Motor Type	DC

ELECTRICAL DATA

Input Power	8W
Energy Saving	YES
Operating Voltage	80-245V~
Frequency	50-60 Hz

DIMENSIONS

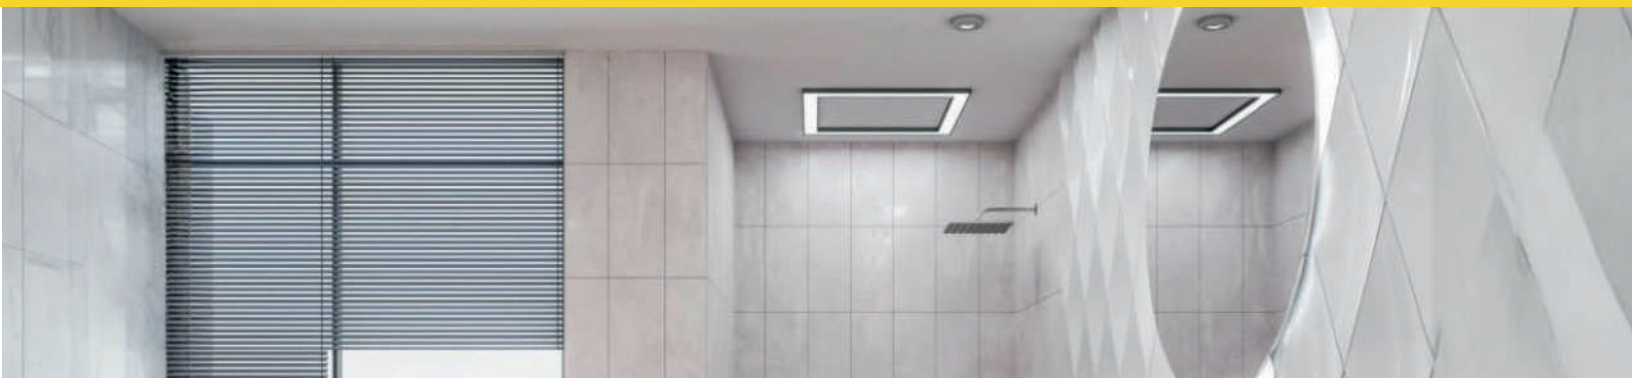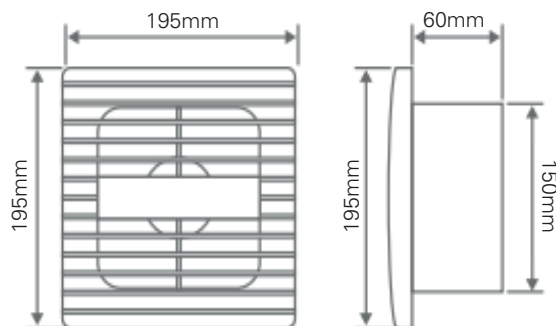

THE MEASURE OF A PRO™


STANLEY®



LED PANELS

RECESSED LED PANEL LIGHT

SXIM-P01 & P05

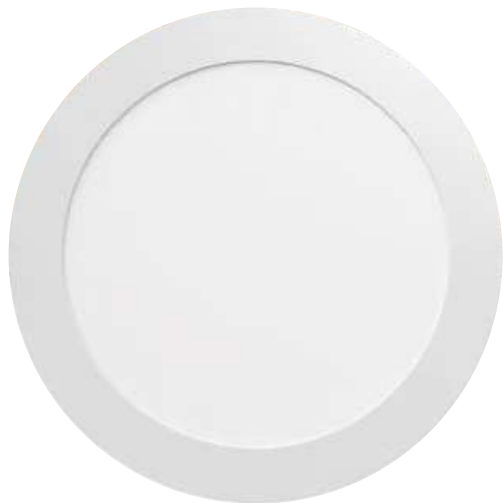

AVAILABLE WATTAGE OPTIONS:

- 3W
- 6W
- 9W
- 12W
- 18W
- 24W

BENEFITS:

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.
- Long lifespan.
- General lighting for limited build-in height.

(CCT) Color Temperature Switch



IP20

SPECIFICATIONS

Shape:	Round LED Lamp
Fitting:	Recessed Ceiling
Finish:	White

ADDITIONAL INFORMATION

Volt:	100-277V 50-60Hz
Beam Angle:	110°
Certification:	CE

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Size	Dimmable / Non Dimmable	Model
3W	3000K	150Lm	83mm x 17mm	Non Dimmable	SXIM-P01-R3W3K
3W	6000K	150Lm	83mm x 17mm	Non Dimmable	SXIM-P01-R3W6K
6W	3000K	360Lm	115mm x 17mm	Non Dimmable	SXIM-P01-R6W3K
6W	6000K	300Lm	115mm x 17mm	Non Dimmable	SXIM-P01-R6W6K
12W	6000K	720Lm	170mm x 17mm	Non Dimmable	SXIM-P01-12W6K
18W	6000K	1440Lm	220mm x 17mm	Non Dimmable	SXIM-P01-18W6K
9W	3000K, 4000K, 6500K	627Lm, 667Lm, 627Lm	142mm x 17mm	Non Dimmable	SXIM-P05-R9WCCT
12W	3000K, 4000K, 6500K	815Lm, 916Lm, 827Lm	170mm x 17mm	Non Dimmable	SXIM-P05-R12WCCT
18W	3000K, 4000K, 6500K	1100Lm, 1200Lm, 1100Lm	220mm x 17mm	Non Dimmable	SXIM-P05-R18W-CCT
24W	3000K, 4000K, 6500K	1730Lm, 1900Lm, 1730Lm	280mm x 17mm	Non Dimmable	SXIM-P05-R24WCCT



THE MEASURE OF A PRO™

RECESSED LED PANEL LIGHT

SXIM-P02 & P06



AVAILABLE WATTAGE OPTIONS:

- 6W
- 12W
- 18W

BENEFITS:

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.
- Long lifespan.
- General lighting for limited build-in height.

(CCT) Color Temperature Switch



IP20

SPECIFICATIONS

Shape:	Square LED Lamp
Fitting:	Recessed Ceiling
Finish:	White

ADDITIONAL INFORMATION

Volt:	100-277V 50-60Hz
Beam Angle:	110°
Certification:	CE

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Size	Dimmable / Non Dimmable	Model
12W	6000K	720Lm	170mm x 170mm	Non Dimmable	SXIM-P02-12W6K
18W	6000K	1440Lm	220mm x 220mm	Non Dimmable	SXIM-P02-18W6K
6W	3000K, 4000K, 6500K	323Lm/398Lm/332Lm	119mm x 119mm	Non Dimmable	SXIM-P06-S6WCCT
12W	3000K, 4000K, 6500K	733Lm/824Lm/744Lm	170mm x 170mm	Non Dimmable	SXIM-P06-S12WCCT
18W	3000K, 4000K, 6500K	1430Lm/1580Lm/1430Lm	220mm x 220mm	Non Dimmable	SXIM-P06-S18WCCT



THE MEASURE OF A PRO™

LED SURFACE PANEL LIGHT

SXIM-P03 & P07




AVAILABLE WATTAGE OPTIONS:

- 6W
- 12W
- 18W
- 24W

BENEFITS:

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.
- Long lifespan.
- General lighting for limited build-in height.

(CCT) Color Temperature Switch



IP20

SPECIFICATIONS

Shape:	Round LED Lamp
Fitting:	Surface Mounted Ceiling
Finish:	White or Black

ADDITIONAL INFORMATION

Volt:	100-277V 50-60Hz
Beam Angle:	110°
Certification:	CE

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Size	Dimmable / Non Dimmable	Model
6W	6000K	390Lm	D-110mm H-28mm	Non Dimmable	SXIM-P03-R6W6K
12W	6000K	750Lm	D-160mm H-28mm	Non Dimmable	SXIM-P03-12W6K
18W	6000K	1200Lm	D-210mm H-28mm	Non Dimmable	SXIM-P03-18W6KWH
18W	6000K	1200Lm	D-210mm H-28mm	Non Dimmable	SXIM-P03-18W6KBK
24W	6000K	1200Lm	D-210mm H-28mm	Non Dimmable	SXIM-P03-R24W6K
18W	3000K, 4000K, 6500K	1430Lm, 1580Lm, 1430Lm	D-210mm H-28mm	Non Dimmable	SXIM-P07-18WCTWH
18W	3000K, 4000K, 6500K	1430Lm, 1580Lm, 1430Lm	D-210mm H-28mm	Non Dimmable	SXIM-P07-18WCTBK
24W	3000K, 4000K, 6500K	1730Lm, 1900Lm, 1730Lm	D-280mm H-35mm	Non Dimmable	SXIM-P07-R24WCCT



THE MEASURE OF A PRO™

LED SURFACE MOUNTED PANEL LIGHT

SXIM-P04 & P08



AVAILABLE WATTAGE OPTIONS:

- 12W
- 18W
- 24W

BENEFITS:

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.
- Long lifespan.
- General lighting for limited build-in height.

(CCT) Color Temperature Switch



IP20

SPECIFICATIONS

Shape:	Square LED Lamp
Fitting:	Surface Mounted Ceiling
Finish:	White or Black

ADDITIONAL INFORMATION

Volt:	100-277V 50-60Hz
Beam Angle:	110°
Certification:	CE

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Size	Dimmable / Non Dimmable	Model
12W	6000K	720Lm	170mm x 170mm x 28mm	Non Dimmable	SXIM-P04-12W6K
18W	6000K	1440Lm	220mm x 220mm x 28mm	Non Dimmable	SXIM-P04-18W6KWH
18W	6000K	1440Lm	220mm x 220mm x 28mm	Non Dimmable	SXIM-P04-18W6KKBK
12W	3000K, 4000K, 6500K	815Lm	160mm x 170mm x 28mm	Non Dimmable	SXIM-P08-S12WCCT
18W	3000K, 4000K, 6500K	1248Lm	220mm x 220mm x 28mm	Non Dimmable	SXIM-P08-18WCTBK
18W	3000K, 4000K, 6500K	1080Lm, 1200Lm, 1080Lm	220mm x 220mm x 28mm	Non Dimmable	SXIM-P08-18WCTWH
24W	3000K, 4000K, 6500K	1080Lm, 1200Lm, 1080Lm	282mm x 282mm x 28mm	Non Dimmable	SXIM-P08-S24WCCT



THE MEASURE OF A PRO™

LED SURFACE PANEL LIGHT WITH MOTION SENSOR

FATMAX®

SXIM-P09-18WCCT


AVAILABLE WATTAGE OPTIONS:

- 18W CCT

BENEFITS:

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.
- Long lifespan.
- General lighting for limited build-in height.

(CCT) Color Temperature Switch



CE

IP20

SPECIFICATIONS

Shape:	Round LED Lamp With Motion Sensor
Fitting:	Surface Mounted Ceiling
Finish:	White

ADDITIONAL INFORMATION

Volt:	100-277V 50-60Hz
Beam Angle:	110°
Certification:	CE

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Size	Dimmable / Non Dimmable	Model
18W	3000K/4000K/6500K	1440Lm/1440Lm/1415Lm	D-210mm H-37mm	Non Dimmable	SXIM-P09-18WCCT



THE MEASURE OF A PRO™

DIMMABLE LED PANEL

FATMAX®

SXIM-P10-R6-5CCT/R12W-5CCT



AVAILABLE WATTAGE OPTIONS:

- 6W CCT
- 12W CCT

BENEFITS:

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.
- Long lifespan.
- General lighting for limited build-in height.

(CCT) Color Temperature Switch



IP20

SPECIFICATIONS

Shape:	Round LED Lamp
Fitting:	Surface Mounted Ceiling
Finish:	White

ADDITIONAL INFORMATION

Volt:	100-130V 50-60Hz
Beam Angle:	110°
Certification:	CE

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Size	Dimmable / Non Dimmable	Model
6W	2700K/3000K/3500K/4000K/5000K	450 Lm	D-120mm H-20mm	Dimmable	SXIM-P10-R6W-5CCT
12W	2700K/3000K/3500K/4000K/5000K	945 Lm	D-170mm H-20mm	Dimmable	SXIM-P10-R12W-5CCT



THE MEASURE OF A PRO™

STANLEY®



COMMERCIAL LIGHTING

©2026 Stanley Black & Decker, Inc. Stanley® and the Stanley/ logo are trademarks of Stanley Black & Decker, Inc. or an affiliate thereof and are used under license. Manufactured by Lighting & Hardware Distribution Inc., Panama Headquarters, 1 (888) 502-8432, www.lightingandhardware.com

LED UFO HIGHBAY CCT & POWER SELECT

FATMAX®

SXIM-UFO-01-100PS-CCT



Power Selectable: 3-IN-ONE, 60W, 80W, 100W

3 CCT Selectable: 4000K, 5000K, 6000K

3 beam angles Selectable : 60°, 90°, 105° with zoomable optic design by simple rotation, Tool free Installation and Maintenance.

The ripple-like lens cover diffuses the dazzling light generated by individual LEDs.

FEATURES

- Built in high luminous efficiency LED Chip and Driver.
- Fast connection
- IP65
- Adjustable Beam Angle
- High efficacy to improve product ROI

APPLICATION

- Factory Workshop
- Warehouse
- Parking Lot
- Conference Room
- Storage Room
- Sports Field



CE IP65



Multi Beam Angle
Switchable



Multi Wattage
Switchable



Multi Color
Temperature
(CCT)

OPTICAL DATA

Color Temperature	4000k, 5000k, 6000k
Luminous Flux	10230, 13200, 15950 Lm
Beam Angle	60°, 90°, 105° Adjustable
Type of Distribution	Direct Symmetrical
Optical Material	Diffuser PC
Life Span	50 000 Hrs


PHYSICAL DATA

Finish	Black
Protection Level - IP	IP65
Dimensions	225 X 142 mm
Type of Installation	Pendant, Ceiling, Wall
Body Frame	Aluminium
Operation Temperature	-30°C to +45°C

ELECTRICAL DATA

Input Power	60W, 80W, 100W
Power Switchable	YES
Operating Voltage	100-277V
Frequency	50-60 Hz
Power Factor	>0.9
CRI	80
Dimmable	NO

DIMENSIONS

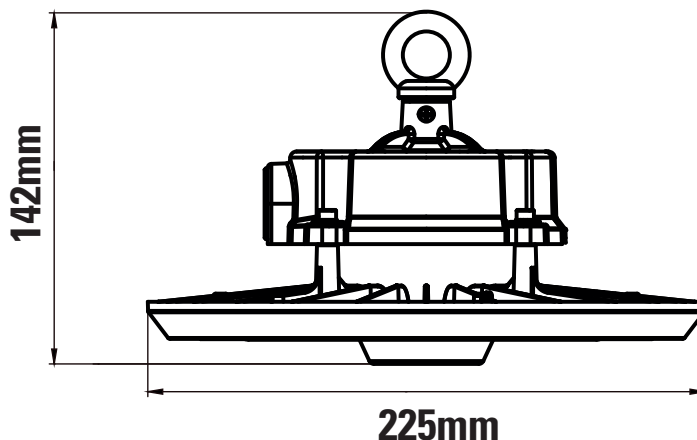

ADDITIONAL INFORMATION


New heat dissipation system
to ensure long lifetime




THE MEASURE OF A PRO™

LED UFO HIGHBAY CCT & POWER SELECT

SXIM-UFO-01-100PS-CCT






3CCT Selectable
4000K, 5000K, 6000K



3 Power-in-1
60W/80W/100W
selectable

**Rotate the lens to change
the beam Angle**

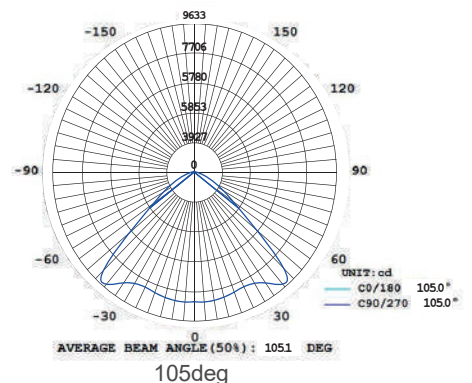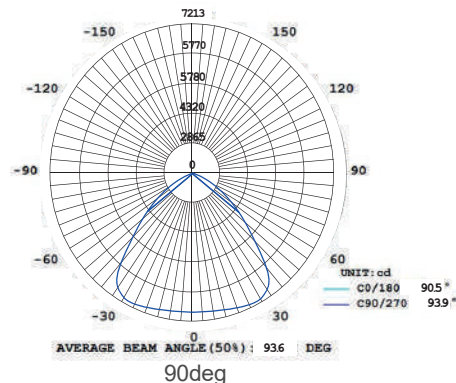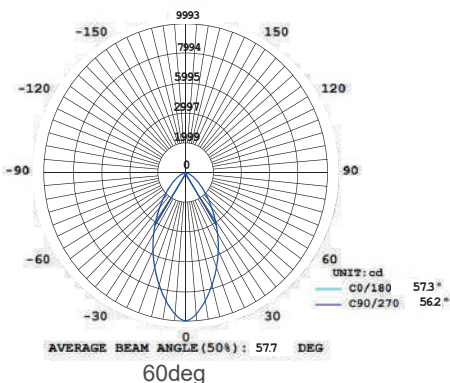

THE MEASURE OF A PRO™

LED UFO HIGHBAY CCT & POWER SELECT

FATMAX®

SXIM-UFO-01-200PS-CCT



Power Selectable: 3-IN-ONE, 110W, 150W, 200W

3 CCT Selectable: 4000K, 5000K, 6000K

3 beam angles Selectable : 60°, 90°, 105° with zoomable optic design by simple rotation, Tool free Installation and Maintenance

The ripple-like lens cover diffuses the dazzling light generated by individual LEDs.

FEATURES

- Built in high luminous efficiency LED Chip and Driver.
- Fast connection
- IP65
- Adjustable Beam Angle
- High efficacy to improve product ROI

APPLICATION

- Factory Workshop
- Warehouse
- Parking Lot
- Conference Room
- Storage Room
- Sports Field



CE IP65



Multi Beam Angle
Switchable



Multi Wattage
Switchable



Multi Color
Temperature
(CCT)

OPTICAL DATA

Color Temperature	4000K , 5000K, 6000K
Luminous Flux	18755, 24750, 31900 Lm
Beam Angle	60°, 90°, 105° Adjustable
Type of Distribution	Direct Symmetrical
Optical Material	Diffuser PC
Life Span	50 000 Hrs


PHYSICAL DATA

Finish	Black
Protection Level - IP	IP 65
Dimensions	250 X 162 mm
Type of Installation	Pendant , Ceiling, Wall
Body Frame	Aluminium
Operation Temperature	-30°C to +45°C

ELECTRICAL DATA

Input Power	110W, 150W, 200W
Power Switchable	YES
Operating Voltage	100-277V
Frequency	50-60 Hz
Power Factor	>0.9
CRI	80
Dimmable	NO

DIMENSIONS

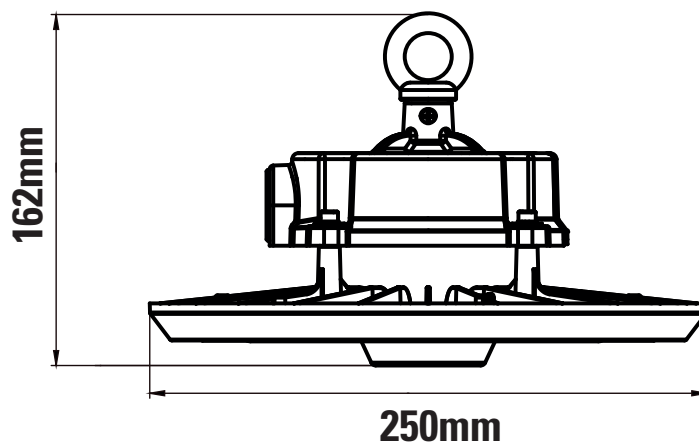

ADDITIONAL INFORMATION


New heat dissipation system
to ensure long lifetime




THE MEASURE OF A PRO™

LED UFO HIGHBAY CCT & POWER SELECT

SXIM-UFO-01-200PS-CCT






3CCT Selectable
4000K, 5000K, 6000K



3 Power-in-1
110W/150W/200W
selectable

**Rotate the lens to change
the beam Angle**

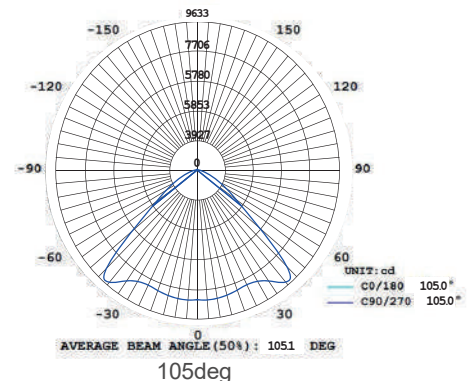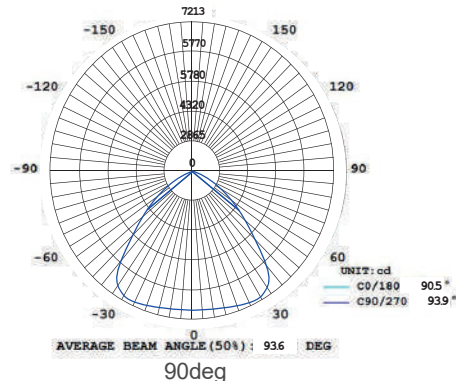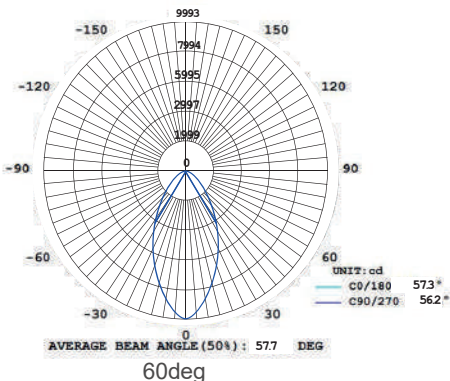

THE MEASURE OF A PRO™

LED CANOPY LAMP

FATMAX

SXIMCAN01-PSCCT



The CAN-01 Selectable Canopy Light is a contractor experience LED canopy light – designed to save you money, save you time, and install quickly. 3 selectable lumen outputs for different ceiling heights and 3 selectable CCT color outputs. Fast installation that's prime for an easy retrofit – engineered with your experience first.

FEATURES

- Built in high luminous efficiency LED Chip and Driver.
- 3 Level Power Switchable
- Fast connection, IP65

APPLICATION

- Industrial Areas
- Sidewalks
- Commercial Areas
- Parks
- Schools
- And others.



LED



Indoor / Outdoor

Multi Wattage Switchable



Multi Color Temperature (CCT)



Easy Installation



Water Proof

OPTICAL DATA

Color Temperature (CCT)	4000K, 5000K, 6000K
Luminous Flux	5440Lm, 8160Lm
	11560Lm, 13600Lm
Beam Angle	100°
Type of Distribution	Direct Symmetrical
Life Span	50 000 Hrs

PHYSICAL DATA

Finish	Black
Protection Level - IP	IP65
Dimensions	242x242x80mm
Type of Installation	Surface Mounted
Body Frame	Die-Cast Aluminium
Weight	2.2 Kg
Operation Temperature	-40°C to +50°C


ELECTRICAL DATA

Input Power	40W, 60W, 80W, 100W
Power Switchable	YES
Operating Voltage	120-277V
Frequency	50-60 Hz
Power Factor	>0.95
CRI	70

DIMENSIONS



LUMINOUS INTENSITY DISTRIBUTION

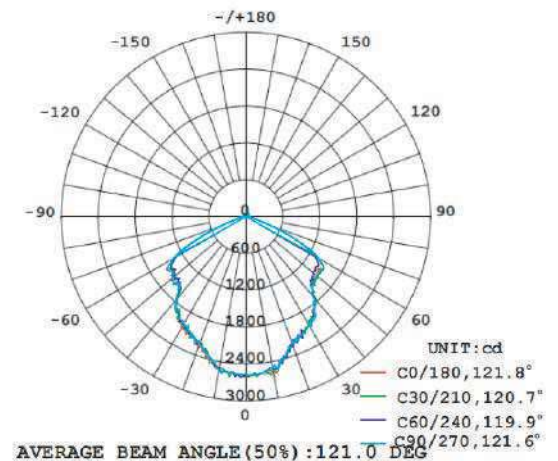

THE MEASURE OF A PRO™


LED WALL LAMP

FATMAX®

SXIMWP01-PSCCT



Open the button to select



Outdoor

Rugged, die-cast housing with advanced thermal management system ensures reliability and durability. Weather-proof, gasketed driver compartment protects electronics against environmental elements.

Tunable CCT for 3000K, 4000K, 5000K, Color Temperature Options Anti-UV Prismatic Translucent Lens Designed to Shape the Light Distribution and Uniformity.

Mounting via J-box or Surface Conduit. Casting Thermally Conducts LED Heat to Optimize Performance and Long Life.

Pre-Installed Photocell Sensor

FEATURES

- Built in high luminous efficiency LED Chip and Driver.
- 3 Level Power Switchable
- Fast connection
- IP65

APPLICATION

- Industrial Areas
- Schools
- Sidewalks
- Residential



**PHOTOCELL
SENSOR**



**Multi Wattage
Switchable**



**Multi Color
Temperature
(CCT)**



**Easy
Installation**



**Water
Proof**

OPTICAL DATA

Color Temperature (CCT)	4000K, 5000K, 6000K
Luminous Flux	1890Lm, 2520Lm
	3150Lm, 3780Lm
Beam Angle	100°
Type of Distribution	Direct Symmetrical
Life Span	50 000 Hrs
Weight	0.52 kg


PHYSICAL DATA

Finish	Black
Protection Level - IP	IP65
Dimensions	144x224x85mm
Type of Installation	Surface Mounted
BodyFrame	Die-Cast Aluminium
Optical Material	Diffuser PC
Operation Temperature	-40°C to +50°C


ELECTRICAL DATA

Input Power	15W, 20W, 25W, 30W
Power Switchable	YES
Operating Voltage	120-277 V
Frequency	50-60 Hz
Power Factor	>0.95
CRI	70

DIMENSIONS



LUMINOUS INTENSITY DISTRIBUTION

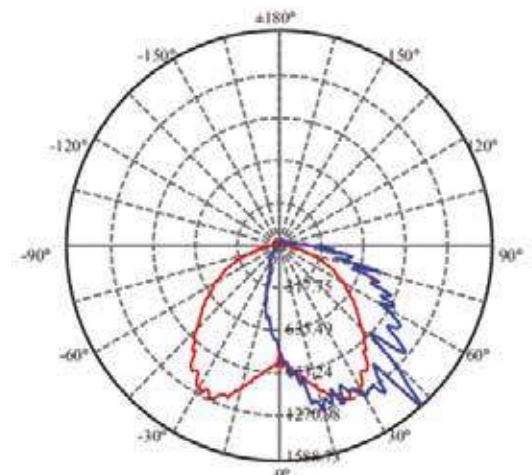

THE MEASURE OF A PRO™

LED WALL LAMP

FATMAX®

SXIMWP02-PSCCT



Indoor / Outdoor

Two-Piece Die-Cast Aluminum Housing with Thermally Conductive LED Panel and Electrical Chamber
Tunable CCT for 4000K, 5000K, 6000K, Color Temperature Options
Anti-UV Prismatic Translucent Lens Designed to Shape the Light Distribution and Uniformity.
Mounting via J-box or Surface Conduit

FEATURES

- Built in high luminous efficiency LED Chip and Driver.
- 3 Level Power Switchable
- Fast connection
- IP65

APPLICATION

- Industrial Areas • Parks
- Sidewalks • Schools
- Squares • And others.



LED



Multi Wattage
Switchable



Multi Color
Temperature
(CCT)



Easy
Installation



Water
Proof

OPTICAL DATA

Color Temperature (CCT)	4000K, 5000K, 6000K
Luminous Flux	3750Lm, 5625Lm
	7500Lm, 10000Lm
Beam Angle	100°
Type of Distribution	Direct Symmetrical
Life Span	50 000 Hrs


PHYSICAL DATA

Finish	Black
Protection Level - IP	IP65
Dimensions	363x233x163mm
Type of Installation	Surface Mounted
Body Frame	Die-Cast Aluminium
Weight	2.05 Kg
Operation Temperature	-40°C to +50°C


ELECTRICAL DATA

Input Power	30W, 45W, 60W, 80W
Power Switchable	YES
Operating Voltage	120-277V
Frequency	50-60 Hz
Power Factor	>0.95
CRI	70

DIMENSIONS

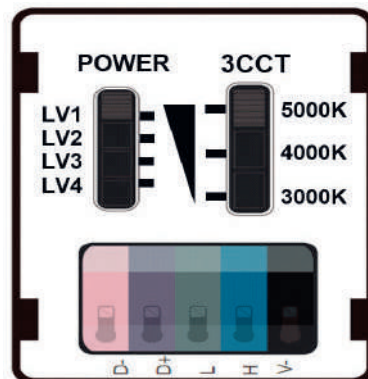

LUMINOUS INTENSITY DISTRIBUTION

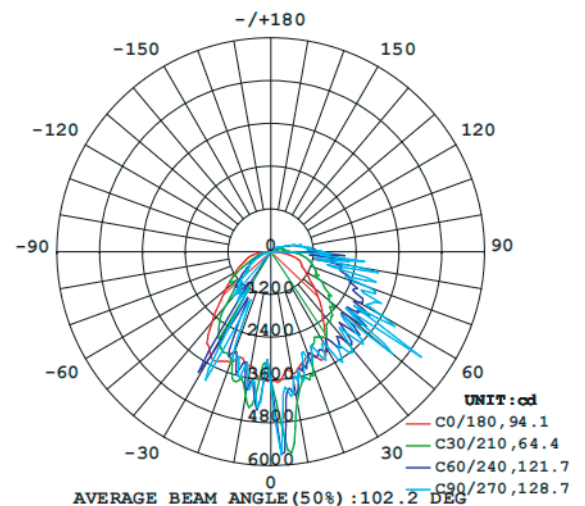

THE MEASURE OF A PRO™

LED LINEAR LIGHT CCT

FATMAX®

SXIML01-CCT



LED Linear luminaire, homogeneous light distribution without shadows, for a continuous, clean and simple lighting system. Modern and compact design with LED strip and opalized diffuser.

With 3 installation methods: Pendant, surface-mounted, or recessed/Trimless

FEATURES

- 3 Color Switchable Selection 3000K/4000K/6500K
- 1.5 Mt Pendant Kit Adjustable
- Ability to operate in cold conditions.
- Design flexibility.
- General lighting for limited build-in height.
- Instant lighting and the ability to withstand frequent switching.
- Interconnectable

APPLICATION

- Offices • Commercial Areas
- Stores • Educational Institutions



LED



Multi Color
Temperature
(CCT)



Eco
Friendly



3 Type of
Installation

Hanging, Surface & Recessed

OPTICAL DATA

Color Temperature (CCT)	3000K, 4000K, 6500K
Luminous Flux	2000 Lm or 4000 Lm
Beam Angle	110°
Type of Distribution	Direct Symmetrical
Efficiency	100 Lm/W



PHYSICAL DATA

Finish	Black/White
Protection Level - IP	IP20
Dimensions (20W)	600x50x70 mm
Dimensions (40W)	1200x50x70 mm
Type of Installation	3 Type of Installation
Body Frame	Aluminium
Optical Material	PMMA


ELECTRICAL DATA

Input Power	20W or 40W
Driver Type	Isolated Driver
Operating Voltage	100-277 V
Frequency	50-60 Hz
CRI	80
Operation Temperature	-20°C to +40°C

DIMENSIONS

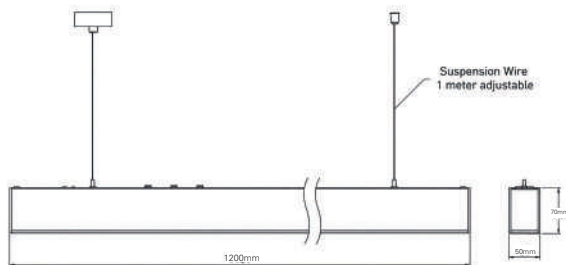


(CCT) Color Temperature Switch




Select one of the following 3 installation methods:


3 Tri-mount
Options



Pendant Installation



Surface Installation





Recessed Installation



Seamless interconnectable effect

ADDITIONAL INFORMATION

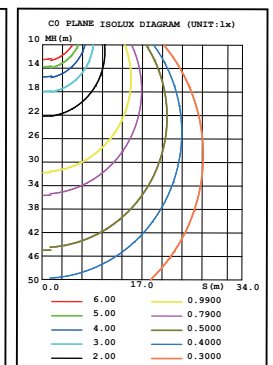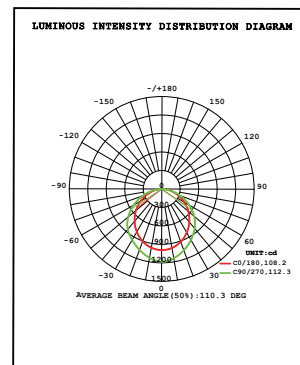

THE MEASURE OF A PRO™

LED LINEAR LIGHT

SXIMSST01



3 CCT
selectable



LED accessories for linear lighting fixtures. Aluminum connection modules designed to create L, T and X configurations for LED linear luminaires. Provide seamless continuity, uniform illumination, and modern architectural aesthetics. Easy to install and connect, with CCT switch (3000K/4000K/6500K). Ideal for commercial and professional lighting systems.

FEATURES

- Aluminum extruded body with durable finish
- CCT color Selection 3000K / 4000K / 6500K
- Surface ceiling mounting

APPLICATION

- Residential
- Offices
- Showrooms
- Commercial Corridors
- Supermarkets

SPECIFICATIONS

Color Temperature (CCT)	3000K, 4000K, 6500K
Finish	White or Black


ELECTRICAL DATA

CRI	80
Protection Level - IP	IP20


AVAILABLE OPTIONS

Power	3 CCT Tone	Lumens	Volt	Dimmable / Non Dimmable	Model
20W	3000K, 4000K, 6500K	2400Lm	100-277V/50-60Hz	Non Dimmable	SXIML01XWH20W
20W	3000K, 4000K, 6500K	2400Lm	100-277V/50-60Hz	Non Dimmable	SXIML01XBK20W
20W	3000K, 4000K, 6500K	2400Lm	100-277V/50-60Hz	Non Dimmable	SXIML01TWH20W
20W	3000K, 4000K, 6500K	2400Lm	100-277V/50-60Hz	Non Dimmable	SXIML01TBK20W
20W	3000K, 4000K, 6500K	2400Lm	100-277V/50-60Hz	Non Dimmable	SXIML01LWH20W
20W	3000K, 4000K, 6500K	2400Lm	100-277V/50-60Hz	Non Dimmable	SXIML01LBK20W

DIMENSIONS

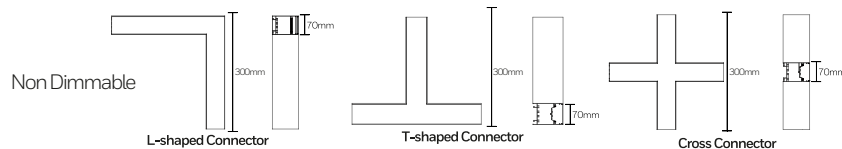

LUMINOUS INTENSITY DISTRIBUTION

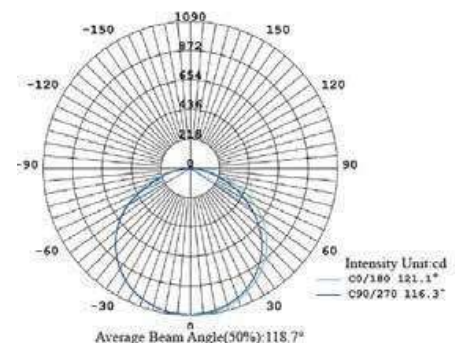

THE MEASURE OF A PRO™

LED LINEAR LIGHT CCT

FATMAX®

SXIML02-PSCCT



UPPER LIGHT KIT
(OPTIONAL)

Indoor

LED Linear luminaire, homogeneous light distribution without shadows, for a continuous, clean and simple lighting system. Modern and compact design with LED strip and opalized diffuser.
With 3 installation methods: pendant, surface-mounted, or recessed/Trimless

FEATURES

- 3 Color Switchable Selection 3000K/4000K/6500K.
- 1.5 Mt Pendant Kit Adjustable.
- Ability to operate in cold conditions.
- General lighting for limited build-in height.
- Instant lighting and the ability to withstand frequent switching.

APPLICATION

- Offices
- Stores
- Commercial Areas
- Educational Institutions



LED



Multi Color
Temperature
(CCT)



Eco
Friendly



3 Type of
Installation

Hanging, Surface & Recessed

OPTICAL DATA

Color Temperature (CCT)	3000K, 4000K, 6500K
Luminous Flux	100 Lm
Beam Angle	110°
Type of Distribution	Direct Symmetrical
Upper Plug (Optional)	
Upper Light	16W
Down Light	24W



PHYSICAL DATA

Finish	Black/White
Protection Level - IP	IP20
Dimensions	1200x50x70 mm
Type of Installation	3 Type of Installation
Body Frame	Aluminium
Optical Material	PC

ELECTRICAL DATA


Input Power	40W
Driver Type	Isolated Driver
Operating Voltage	100-277 V
Frequency	50-60 Hz
CRI	80
Operation Temperature	-20°C to +40°C

DIMENSIONS

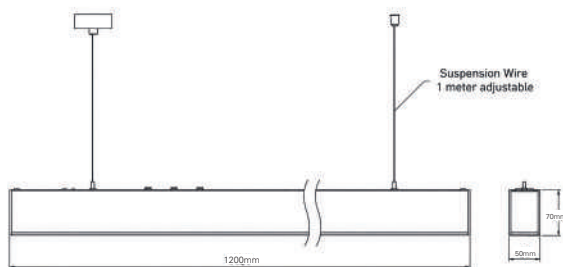


Select one of the following 3 installation methods:


3 Tri-mount
Options



Pendant Installation



Surface Installation





Recessed Installation



Seamless interconnectable effect

ADDITIONAL INFORMATION

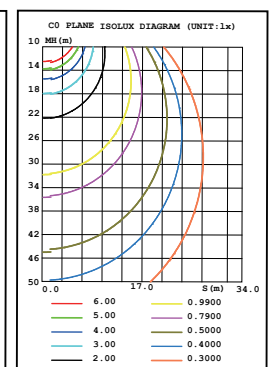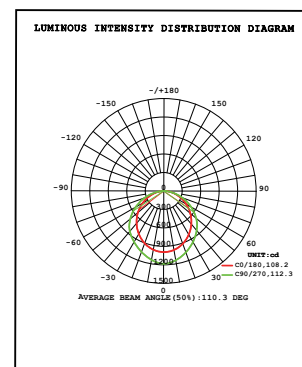

THE MEASURE OF A PRO™

LED PANEL LIGHT 1x4

FATMAX®

SXIMP1X4-01-CCT

Backlit Panel Certified, with high uniform lighting performance.
CCT selectable Switch.

FEATURES

- Backlit design without LGP, No risk of yellowing.
- Energy efficiency: THD > 20%
- No UV emissions
- High light uniformity
- 3 CCT Selectable: 3000K, 4000K, 6000K could be adjusted with a switch

APPLICATION

- Classroom
- Office
- Meeting Room
- Shopping Mall
- Commercial Areas
- Hospitality and retail areas

Indoor



LED



Life Span
50,000 H



Multi Color
Temperature
(CCT)



Easy
Installation



Save Money

OPTICAL DATA

Color Temperature (CCT)	3000K, 4000K, 6000K
CCT Switchable	YES
Luminous Flux	4000, 4700, 4450 Lm
Type of Distribution	Direct Symmetrical
Beam Angle	120°
Efficiency	117 Lm/W
Life Span	50 000 Hrs


PHYSICAL DATA

Finish	White
Protection Level - IP	IP20
Dimensions (LxWxH)	300x1200x34 mm
Type of Installation	Recessed or Pendant
Body Frame	Aluminium
Optical Material	Diffuser PS
Operation Temperature	0°C to +40°C


ELECTRICAL DATA

Input Power	40W
Operating Voltage	120-277 V
Frequency	50-60 Hz
Power Rating	>0.90
CRI	80
Dimmable	NO

DIMENSIONS

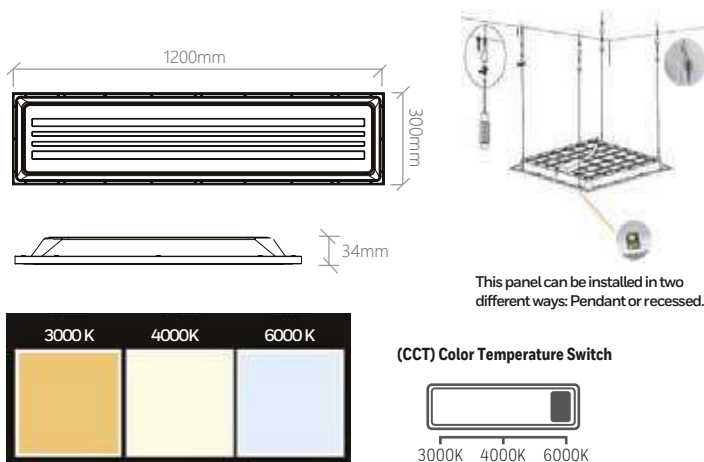

LUMINOUS INTENSITY DISTRIBUTION

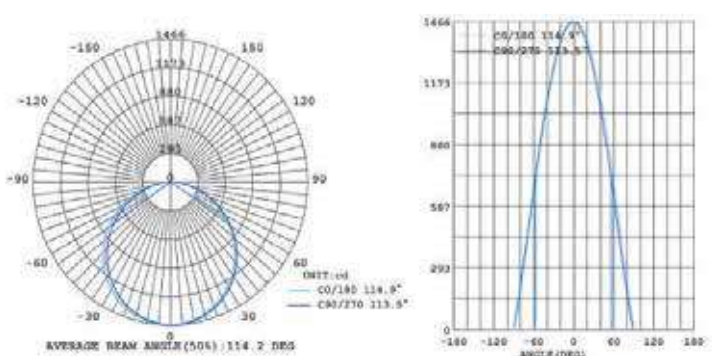


THE MEASURE OF A PRO™

LED PANEL LIGHT 2x2

FATMAX®

SXIMP2X2-01-CCT

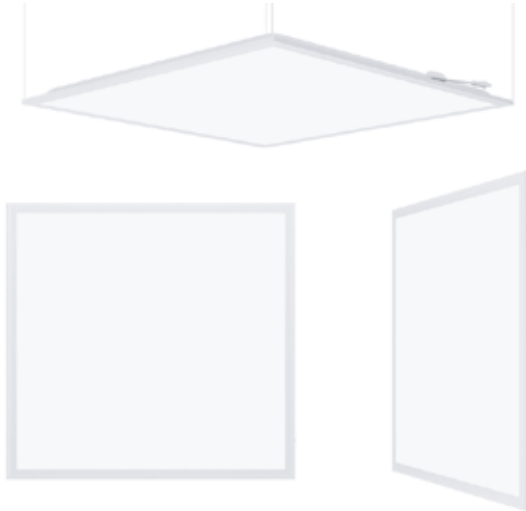

Backlit Panel Certified, with high uniform lighting performance.
CCT selectable switch.

FEATURES

- Backlit design without LGP, No risk of yellowing.
- THD>20%
- Energy efficiency
- Long Lifespan
- No UV emissions
- High uniform lighting
- 3 CCT Selectable: 3000K, 4000K, 6000K could be adjusted with a switch

APPLICATION

- Classroom
- Office
- Meeting Room
- Shopping Mall
- Commercial Areas
- Hospitality and retail areas

CE LED IP20



Multi Color
Temperature
(CCT)



Easy
Installation



Save
Money



Life Span
50,000 H

OPTICAL DATA

Color Temperature (CCT)	3000K, 4000K, 6000K
CCT Switchable	YES
Luminous Flux	4100, 4700, 4500Lm
Type of Distribution	Direct Symmetrical
Beam Angle	120°
Efficiency	117Lm/W
Life Span	50 000 Hrs


PHYSICAL DATA

Finish	White
Protection Level - IP	IP20
Dimensions (LxWxH)	600x600x34mm
Type of Installation	Recessed or Pendant
Body Frame	Aluminium
Optical Material	Diffuser PS
Operation Temperature	00°C to +40°C


ELECTRICAL DATA

Input Power	40W
Operating Voltage	120-277 V
Frequency	50-60 Hz
Power Rating	>0.90
CRI	80
Dimmable	NO


DIMENSIONS





This panel can be installed in two different ways: pendant or recessed.



(CCT) Color Temperature Switch



LUMINOUS INTENSITY DISTRIBUTION

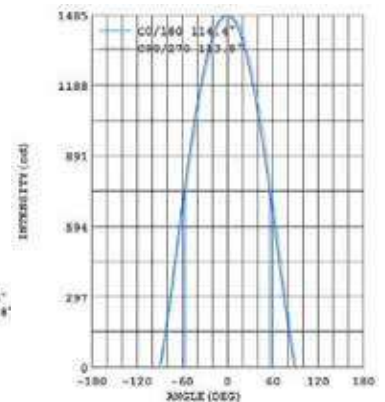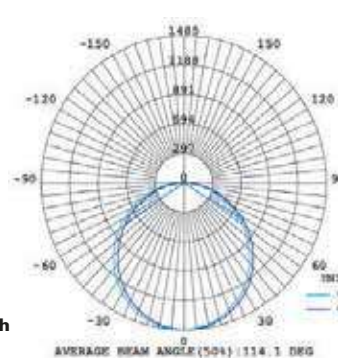

THE MEASURE OF A PRO™

LED SURFACE PANEL LIGHT

FATMAX®

SXIM-P2X4-01-CCT

Backlit Panel Certified, with high uniform lighting performance.
CCT selectable switch.



FEATURES

- Backlit design without LGP, No risk of yellowing.
- Energy efficiency
- THD>20%
- No UV emissions
- High uniform lighting
- 3 CCT Selectable: 3000K, 4000K, 6000K could be adjusted with a switch

APPLICATION

- Classroom
- Office
- Meeting Room
- Shopping Mall
- Commercial Areas
- Hospitality and retail areas



LED



**Multi Color
Temperature
(CCT)**



**Easy
Installation**

OPTICAL DATA

Color Temperature (CCT)	3000K, 4000K, 6000K
CCT Switchable	YES
Luminous Flux	6600, 7400, 7000Lm
Type of Distribution	Direct Symmetrical
Beam Angle	120°
Efficiency	117 Lm / W
Life Span	50 000 Hrs



PHYSICAL DATA

Finish	White
Protection Level - IP	IP20
Dimensions (LxWxH)	1200x600x34mm
Type of Installation	Recessed or Pendant
Body Frame	Aluminium
Optical Material	Diffuser PS
Operation Temperature	0°C to +40°C

ELECTRICAL DATA

Input Power	60W
Operating Voltage	120-277 V
Frequency	50-60 Hz
Power Rating	>0.90
CRI	80
Dimmable	NO

DIMENSIONS

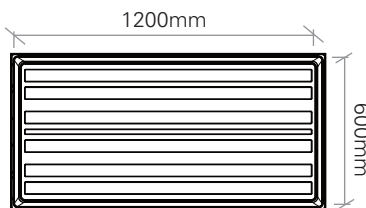



This panel can be installed in two different ways: pendant or recessed.



(CCT) Color Temperature Switch



LUMINOUS INTENSITY DISTRIBUTION

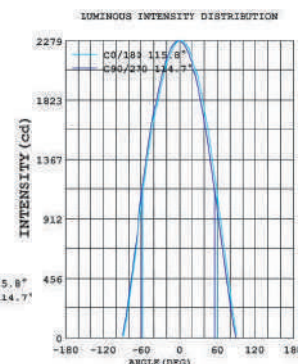

THE MEASURE OF A PRO™

LED PANEL LIGHT

FATMAX®

SXIMP2X2-02-UL

Backlite panel UL Certified, with high uniform lighting performance.
watt and CCT selectable.

FEATURES

- ANSI C82.77-2002 Surge Protector
- THD<20%
- Excellent surface treatment.
- Light in weight and more like traditional grille light, better for user experience.
- Backlit design without LGP, No risk of yellowing.
- Fully Automated production lines guarantees short lead time.
- 3 CCT Selectable: 3500K, 4000K, 5000K could be adjusted with a switch

APPLICATION

Classroom Shopping Mall
Office Commercial Areas
Meeting Room And others



RoHS



OPTICAL DATA

Color Temperature (CCT)	3500K, 4000K, 5000K
CCT Switchable	YES
Luminous Flux	5330 lm
Type of Distribution	Direct Symmetrical
Beam Angle	120°
Efficiency	150 lm/W
Life Span	50 000 Hrs


PHYSICAL DATA

Finish	White
Protection Level - IP	IP20
Dimensions (LxWxH)	604x604x38mm
Type of Installation	Recessed or Pendant
Body Frame	Aluminium
Optical Material	Diffuser PC
Operation Temperature	-20°C to +40°C

ELECTRICAL DATA

Input Power	20W, 30W, 35W
Power Switchable	YES
Operating Voltage	120-277 V
Frequency	50-60 Hz
Power Rating	>0.90
CRI	80
Dimmable	0-10V


DIMENSIONS

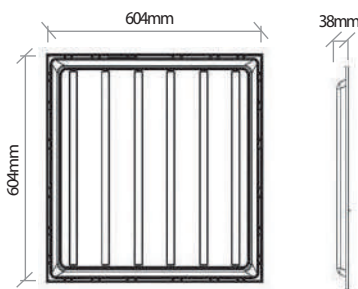



This panel can be installed in two different ways: Pendant or recessed.




Power Selectable Switch



(CCT) Color Temperature Switch



LUMINOUS INTENSITY DISTRIBUTION

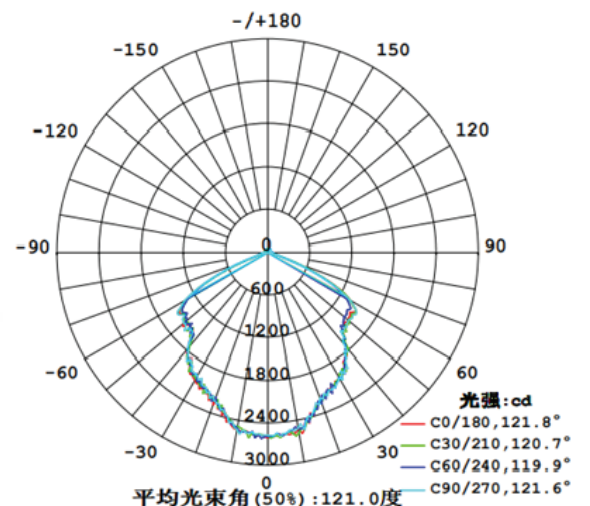

THE MEASURE OF A PRO™

LED PANEL LIGHT

FATMAX®

SXIMP2X4-02-UL

Backlit Panel UL Certified, with high uniform lighting performance.
CCT selectable switch.



Indoor

FEATURES

- Backlit design without LGP, No risk of yellowing.
- ANSI C82.77-2002 Surge Protector
- THD<20%
- Energy efficiency
- No UV emissions
- High light uniformity
- 3 CCT Selectable: 3500K, 4000K, 5000K could be adjusted with a switch

APPLICATION

- Classroom
- Office
- Meeting Room
- Shopping Mall
- Commercial Areas
- Hospitality and retail areas



RoHS



Multi Color
Temperature
(CCT)



Multi Wattage
Switchable

OPTICAL DATA

Color Temperature (CCT)	3500K, 4000K, 5000K
CCT Switchable	YES
Luminous Flux	4260/4390/6090 Lm
Type of Distribution	Direct Symmetrical
Beam Angle	120°
Efficiency	135 Lm/W
Life Span	50 000 Hrs



PHYSICAL DATA

Finish	White
Protection Level - IP	IP20
Dimensions (LxWxH)	1214x604x38mm
Type of Installation	Recessed or Pendant
Body Frame	Aluminium
Optical Material	Diffuser PC
Operation Temperature	-20°C to +40°C

ELECTRICAL DATA

Input Power	30W, 35W, 45W
Power Switchable	YES
Operating Voltage	120-277 V
Frequency	50-60 Hz
Power Rating	>0.90
CRI	80
Dimmable	0-10V


DIMENSIONS

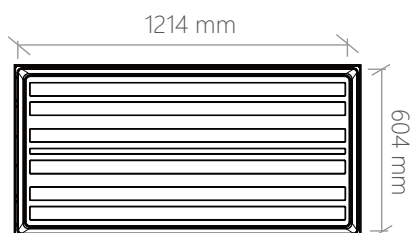


This panel can be installed in two different ways: pendant or recessed.




(CCT) Color Temperature Switch



Power Selectable Switch



LUMINOUS INTENSITY DISTRIBUTION

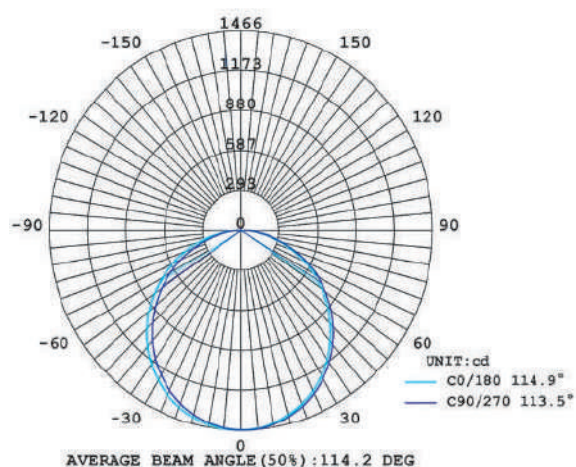

THE MEASURE OF A PRO™

LED STREET LIGHT CCT

FATMAX®

SXIMST-01-PSCCT



LED luminaire for street and outdoor lighting, modern and compact design, uniform light projection, high efficiency, long life and easy installation, reduces energy consumption and maintenance costs.

FEATURES:

- Heavy Duty Die Cast aluminum housing with ample heat sinking.
- Angle of inclination adjustable in $\pm 90^\circ$.
- Slipfit Arm included.
- IP65/IK08/4KV Rating.
- Long Lifespan.

APPLICATION

- Park
- Square
- Trails
- Public or Private roads
- Parking lot
- Bridges
- Residential Buildings
- Others



CE IP65

PHOTOCELL
SENSOR



Multi Color
Temperature
(CCT)



Multi Wattage
Switchable



Water
Proof

OPTICAL DATA

Color Temperature (CCT)	4000K, 5000K, 6000K
Lumens	16,856 lm/24,359 lm/30,455lm
Beam Angle	80x150° Type III
Type of Distribution	Direct Symmetrical
Life Span	50 000 H
Optical Material	Diffuser PC


PHYSICAL DATA

Finish	Black
Protection Level - IP	IP65
Dimensions (LxWxH)	300x 438x 62mm
Body Frame	Die -Cast Aluminium
Weight	5.22 kg
Operation Temperature	-40°C to +50°C


ELECTRICAL DATA

Input Power	100W, 150W, 200W
Power Switchable	YES
Operating Voltage	120-277 V
Frequency	50-60 Hz
Power Factor	>0.95
CRI	70

DIMENSIONS

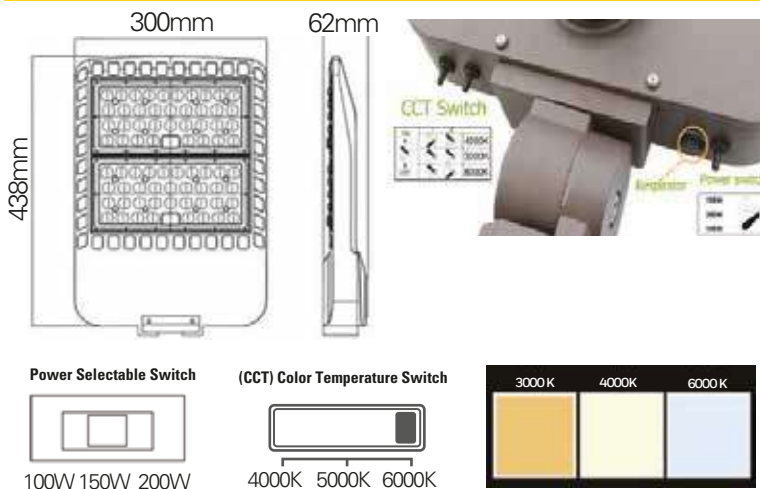

ADDITIONAL INFORMATION

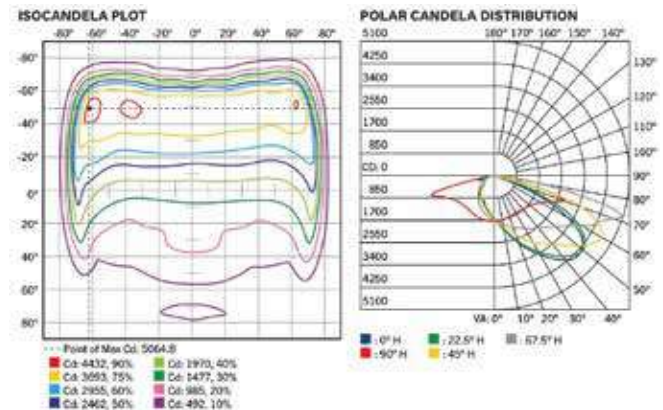

THE MEASURE OF A PRO™

LED STREET LIGHT CCT

FATMAX

SXIMST01-100WCT



High-performance LED street light with integrated photocell sensor and 3CCT selectable technology. Designed for roadway, parking lot, and outdoor area illumination.

FEATURES:

- Integrated Photocell Sensor (Auto ON/OFF)
- 3CCT Selectable: 4000K / 5000K / 6000K
- Type III Light Distribution
- High Efficiency: 140-150 lm/W
- Wide Voltage Range: 120-277 VAC
- Slipfitter Arm A-C Included
- Suitable for Wall Mount & Pole Mount
- Durable Dark Bronze Finish

APPLICATION

- Roadways
- Industrial Facilities
- Parking Lots
- Commercial Outdoor Areas
- Perimeter Lighting



IP65



Multi Color
Temperature
(CCT)

PHOTOCELL
SENSOR



OPTICAL DATA

Color Temperature (CCT)	4000K, 5000K, 6000K
Lumens	140-150 lm/W
Beam Angle	80x150°
Type of Distribution	Direct Symmetrical
Life Span	50 000 Hrs
Optical Material	Diffuser PC


PHYSICAL DATA

Finish	Black
Protection Level - IP	IP65
Dimensions (LxWxH)	275x268x47 mm
Body Frame	Die -Cast Aluminium
Operation Temperature	-40°C to +50°C
Mounting Options	Slipfitter Arm A-C
(Wall Mount & Pole Mount Compatible)	


ELECTRICAL DATA

Input Power	100W
Power Switchable	YES
Operating Voltage	120-277 V
Frequency	50-60 Hz
Power Factor	>0.95
CRI	70

DIMENSIONS

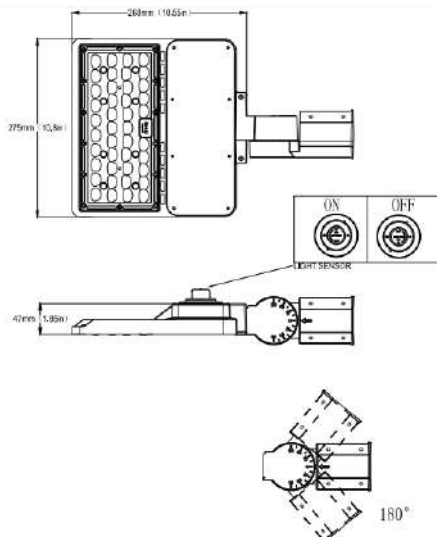

ADDITIONAL INFORMATION

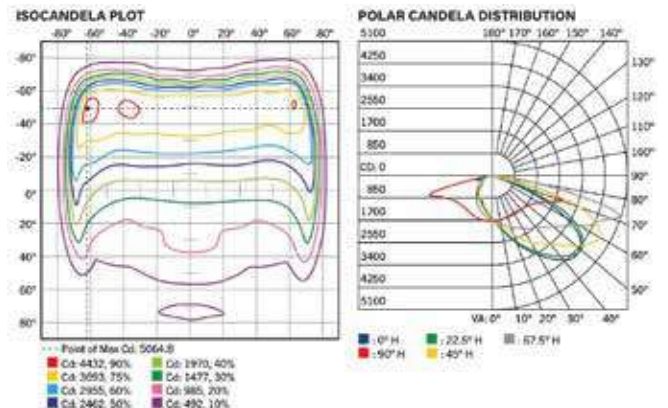

THE MEASURE OF A PRO™

LED STREET LIGHT CCT

FATMAX

SXIMST01-200WCT



High-performance 200W LED street light with integrated photocell sensor and 3CCT selectable technology. Designed for roadways, highways, parking lots, and large outdoor areas requiring high lumen output.

FEATURES:

- Integrated Photocell Sensor (Auto ON/OFF)
- 3CCT Selectable: 4000K / 5000K / 6000K
- Type III Light Distribution
- High Efficiency: 140-150 lm/W
- Wide Voltage Range: 120-277 VAC
- Slipfitter Arm A-C Included
- Compatible with Wall Mount & Pole Mount
- Durable Dark Bronze Finish

APPLICATION

- Highways
- Main Roads
- Large Parking Areas
- Industrial Complexes
- Commercial Outdoor Areas



IP65



Multi Color
Temperature
(CCT)

PHOTOCELL
SENSOR



OPTICAL DATA

Color Temperature (CCT)	4000K, 5000K, 6000K
Lumens	140-150 lm/W
Beam Angle	80x150°
Type of Distribution	Direct Symmetrical
Life Span	50 000 Hrs
Optical Material	Diffuser PC


PHYSICAL DATA

Finish	Black
Protection Level - IP	IP65
Dimensions (LxVxH)	300x300x72 mm
Body Frame	Die -Cast Aluminium
Operation Temperature	-40°C to +50°C
Mounting Options	Slipfitter Arm A-C
(Wall Mount & Pole Mount Compatible)	


ELECTRICAL DATA

Input Power	200W
Power Switchable	YES
Operating Voltage	120-277 V
Frequency	50-60 Hz
Power Factor	>0.95
CRI	70


DIMENSIONS

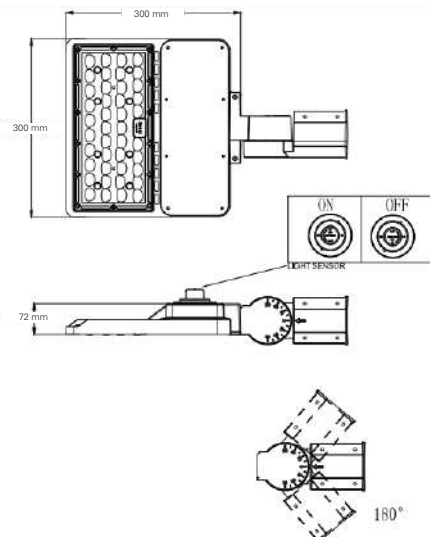

(CCT) Color Temperature Switch



ADDITIONAL INFORMATION

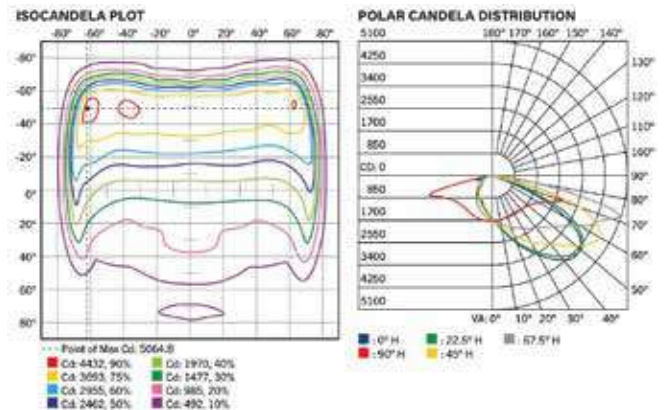

THE MEASURE OF A PRO™

LED FLOOD LIGHT

SXIMFL01-10W3K/6K



Outdoor

LED outdoor floodlight luminaire, slim, modern and moisture-resistant design, aluminum chassis, uniform light projection, reduces energy consumption and maintenance costs, installation surface-mounted with metal support. Includes a breather valve that dissipates moisture.

FEATURES

- Energy efficiency
- Long Lifespan
- No UV emissions
- High uniform lighting
- Anti Siphon Cable

APPLICATION

- Parks & Squares
- Facades
- Parking Lot
- Airport
- External Perimeter
- High Altitudes



IP65

LED



Indoor
Outdoor



Save Money



Easy
Installation

OPTICAL DATA

Color Temperature (CCT)	3000K or 6000K
CCT Switchable	NO
Luminous Flux	930 Lm
Type of Distribution	Direct Symmetrical
Beam Angle	120°
Efficiency	117 Lm / W


PHYSICAL DATA

Finish	Black
Protection Level - IP	IP65
Dimensions (LxWxH)	90x28x65mm
Type of Installation	Wall or Ceiling Mount
Body Frame	Aluminium
Optical Material	Glass
Operation Temperature	-20°C to +40°C


ELECTRICAL DATA

Input Power	10W
Operating Voltage	100-277 V
Frequency	50-60 Hz
Power Rating	>0.90
CRI	80
Dimmable	NO

DIMENSIONS

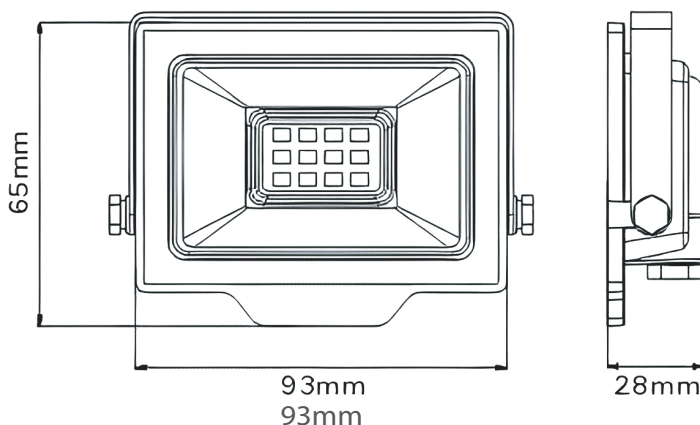

LUMINOUS INTENSITY DISTRIBUTION

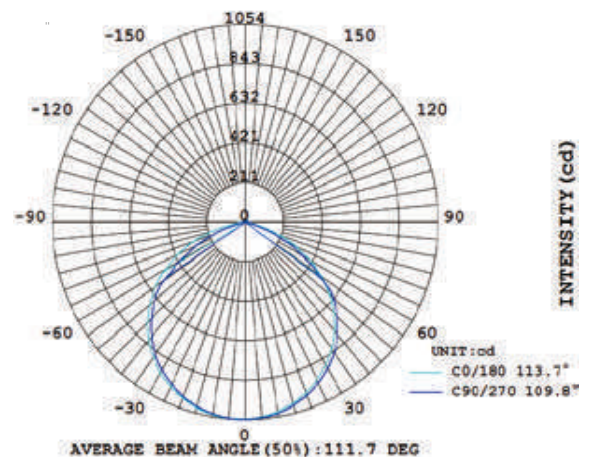

THE MEASURE OF A PRO™

LED FLOOD LIGHT

SXIMFL01-30WCCT



LED outdoor floodlight luminaire, slim, modern and moisture-resistant design, aluminum chassis, uniform light projection, reduces energy consumption and maintenance costs, installation surface-mounted with metal support. Includes a breather valve that dissipates moisture.

FEATURES

- Energy efficiency
- Long Lifespan
- No UV emissions
- High uniform lighting
- Anti Siphon Cable

APPLICATION

- Parks & Squares
- Facades
- Parking Lot
- Airport
- External Perimeter
- High Altitudes



IP65

LED



**Indoor
Outdoor**



**Multi Color
Temperature
(CCT)**



**Easy
Installation**

OPTICAL DATA

Color Temperature (CCT)	3000K, 4000K, 6000K
CCT Switchable	YES
Luminous Flux	3210 Lm
Type of Distribution	Direct Symmetrical
Beam Angle	120°


PHYSICAL DATA

Finish	Black
Protection Level - IP	IP65
Dimensions (LxWxH)	140x28x120mm
Type of Installation	Wall or Ceiling Mount
Body Frame	Aluminium
Optical Material	Glass
Operation Temperature	-20°C to +40°C


ELECTRICAL DATA

Input Power	30W
Operating Voltage	100-277 V
Frequency	50-60 Hz
Power Factor	0.95
CRI	80
Dimmable	NO

DIMENSIONS

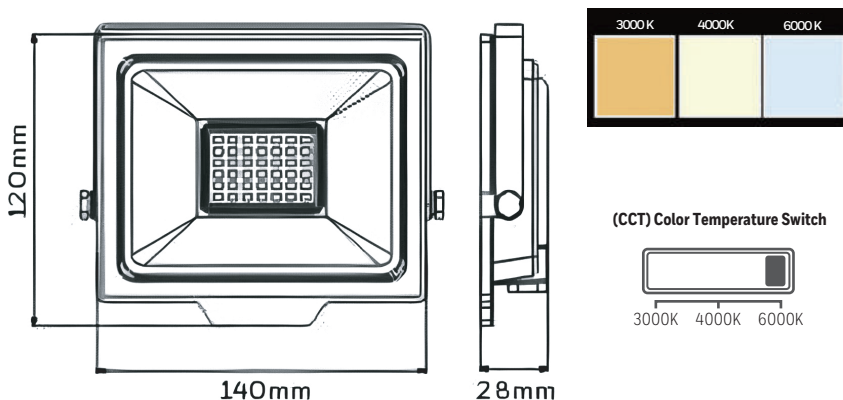

LUMINOUS INTENSITY DISTRIBUTION

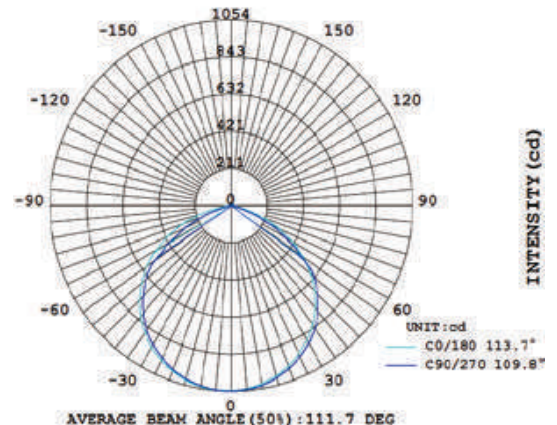

THE MEASURE OF A PRO™

LED FLOOD LIGHT

SXIMFL02-10WRGB/50WRGB



Outdoor

LED outdoor floodlight luminaire, slim, modern and moisture-resistant design, aluminum chassis, uniform light projection, reduces energy consumption and maintenance costs, installation surface-mounted with metal support. RGB color adjustment providing the color tone you

FEATURES

- Remote control included, RGB type.
- Energy efficiency
- No UV emissions
- Long Lifespan

APPLICATION

- Parks & Squares
- Facades
- Parking Lot
- Airport
- External Perimeter
- High Altitudes

CE IP65 LED



Indoor
Outdoor



Save Money



Easy
Installation

SPECIFICATIONS

Model	Power	CCT	Dimensions (LxWxH)	Remote Control	Use
SXIMFL02-10WRGB	10 W	RGB	110x28x90mm	YES	Indoor / Outdoor
SXIMFL02-50WRGB	50 W	RGB	175x28x140mm	YES	Indoor / Outdoor

OPTICAL DATA

Color Temperature (CCT) RGB Color	
Vented	YES
Type of Distribution	Direct Symmetrical
Beam Angle	120°


PHYSICAL DATA

Finish	Black
Protection Level - IP	IP65
Type of Installation	Wall or Ceiling Mount
Body Frame	Aluminium
Optical Material	Glass
Operation Temperature	-20°C to +40°C


ELECTRICAL DATA

Operating Voltage	100-277 V
Frequency	50-60 Hz
CRI	80
Remote Control Included	YES
Dimmable	NO

DIMENSIONS

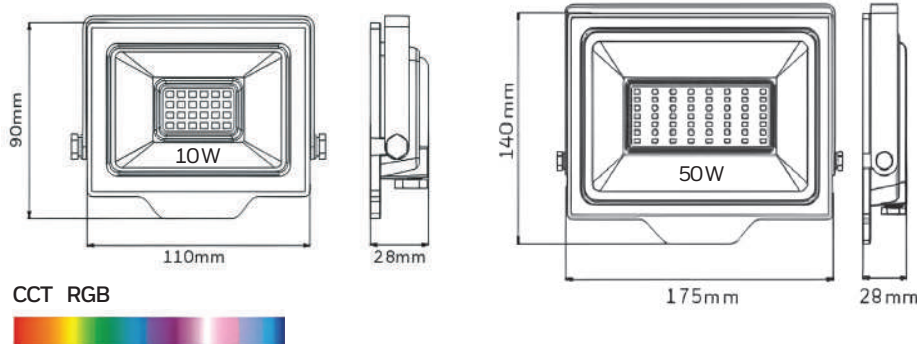

LUMINOUS INTENSITY DISTRIBUTION

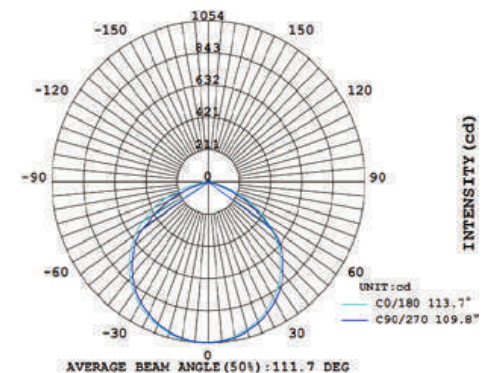

THE MEASURE OF A PRO™

LED FLOOD LIGHT

SXIMFL03100PSCT



Outdoor

LED luminaire for outdoor floodlights, slim, modern and resistant design, aluminum chassis, uniform light projection, reduces energy consumption and maintenance costs, surface mounting with metal bracket. The luminaire includes a breather valve that dissipates moisture.

FEATURES

- Powerful and ideal for working at heights
- IP 66
- No UV emissions
- High uniform lighting

APPLICATION

- Residential
- Sidewalks
- Squares
- Airport
- External Perimeter
- High Altitudes



IP66



Multi Wattage Switchable



Multi Color Temperature (CCT)



Indoor Outdoor



Easy Installation

SPECIFICATIONS

Model	Power Selectable	CCT	Luminous Flux	Dimensions (LxWxH)	Use
SXIMFL03100PSCT	70W / 100W	3000K, 4000K, 6000K	12 700 Lm / 14 000 Lm	266x198x35mm	Indoor / Outdoor

OPTICAL DATA

CCT Switchable	YES
Type of Distribution	Direct Symmetrical
Beam Angle	110°
Efficiency	110 Lm / W
Connector	Plastic Injected Connector
Life Span	50 000 Hrs



PHYSICAL DATA

Finish	Black
Protection Level - IP	IP66
Type of Installation	Wall or Ceiling Mount
Body Frame	Aluminium
Optical Material	Tempered Glass
Operation Temperature	-20°C to +40°C

ELECTRICAL DATA

Power Selectable	YES
Operating Voltage	120-277 V
Frequency	50-60 Hz
Power Rating	>0.90
CRI	80
Dimmable	NO


DIMENSIONS

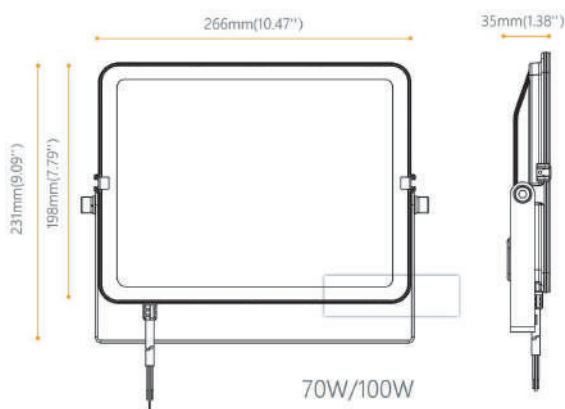

(CCT) Color Temperature Switch




Power Selectable Switch



70W 100W

LUMINOUS INTENSITY DISTRIBUTION

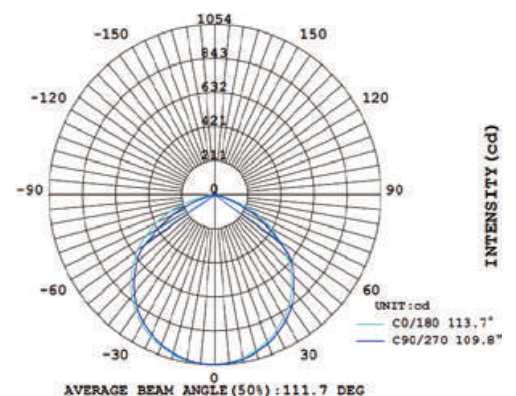

THE MEASURE OF A PRO™

LED FLOOD LIGHT

SXIMFL03-50PSCT



Outdoor

LED luminaire for outdoor floodlights, slim, modern and resistant design, aluminum chassis, uniform light projection, reduces energy consumption and maintenance costs, surface mounting with metal bracket. The luminaire includes a breather valve that dissipates moisture.

FEATURES

- Powerful and ideal for working at heights
- IP 66
- No UV emissions
- High uniform lighting

APPLICATION

- Residential
- Sidewalks
- Squares
- Airport
- External Perimeter
- High Altitudes



IP66



**Multi Wattage
Switchable**



**Multi Color
Temperature
(CCT)**



**Indoor
Outdoor**



**Easy
Installation**

SPECIFICATIONS

Model	Power Selectable	CCT	Luminous Flux	Dimensions (LxWxH)	Use
SXIMFL03-50PSCT	40W / 50 W	3000K, 4000K, 6000K	6800 Lm / 7500 Lm	208x140x33mm	Indoor / Outdoor

OPTICAL DATA

CCT Switchable	YES
Type of Distribution	Direct Symmetrical
Beam Angle	110°
Efficiency	110 Lm / W
Connector	Plastic Injected Connector
Life Span	50 000 Hrs



PHYSICAL DATA

Finish	Black
Protection Level - IP	IP66
Type of Installation	Wall or Ceiling Mount
Body Frame	Aluminium
Optical Material	Tempered Glass
Operation Temperature	-20°C to +40°C

ELECTRICAL DATA

Power Selectable	YES
Operating Voltage	120-277 V
Frequency	50-60 Hz
Power Rating	>0.90
CRI	80
Dimmable	NO

DIMENSIONS

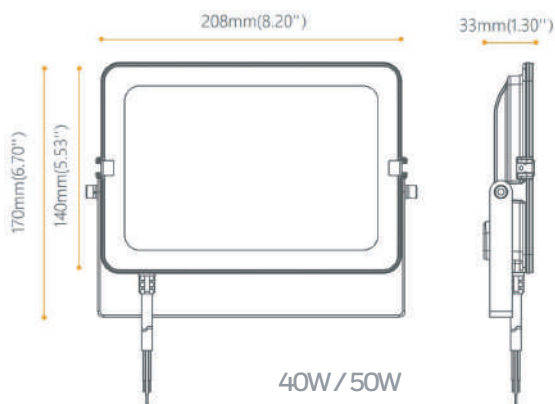


(CCT) Color Temperature Switch



Power Selectable Switch

40W 50W

LUMINOUS INTENSITY DISTRIBUTION

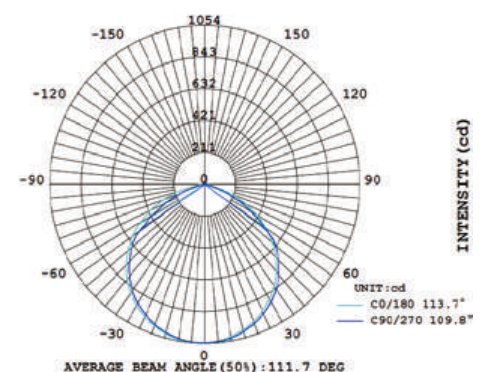

THE MEASURE OF A PRO™

LED FLOOD LIGHT

SXIMFL03200PSCT



Outdoor

LED luminaire for outdoor floodlights, slim, modern and resistant design, aluminum chassis, uniform light projection, reduces energy consumption and maintenance costs, surface mounting with metal bracket. The luminaire includes a breather valve that dissipates moisture.

FEATURES

- Powerful and ideal for working at heights
- IP 66
- No UV emissions
- High uniform lighting

APPLICATION

- Residential
- Sidewalks
- Squares
- Airport
- External Perimeter
- High Altitudes



IP66



Multi Wattage
Switchable



Multi Color
Temperature
(CCT)



Indoor
Outdoor



Easy
Installation

SPECIFICATIONS

Model	Power Selectable	CCT	Luminous Flux	Dimensions (LxWxH)	Use
SXIMFL03200PSCT	150W / 200W	3000K, 4000K, 6000K	19125 Lm / 25500Lm	336x266x39mm	Indoor / Outdoor

OPTICAL DATA

CCT Switchable	YES
Type of Distribution	Direct Symmetrical
Beam Angle	110°
Efficiency	127.5Lm / W
Connector	Plastic Injected Connector
Life Span	50 000 Hrs



PHYSICAL DATA

Finish	Black
Protection Level - IP	IP66
Type of Installation	Wall or Ceiling Mount
Body Frame	Aluminium
Optical Material	Tempered Glass
Operation Temperature	-20°C to +40°C

ELECTRICAL DATA

Power Selectable	YES
Operating Voltage	120-277 V
Frequency	50-60 Hz
Power Rating	>0.90
CRI	80
Dimmable	NO

DIMENSIONS

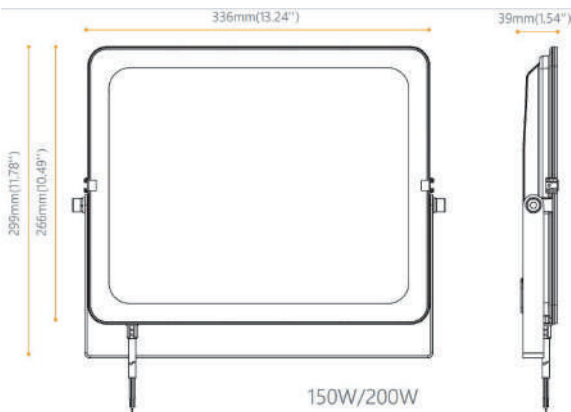


(CCT) Color Temperature Switch



Power Selectable Switch

150W 200W

LUMINOUS INTENSITY DISTRIBUTION

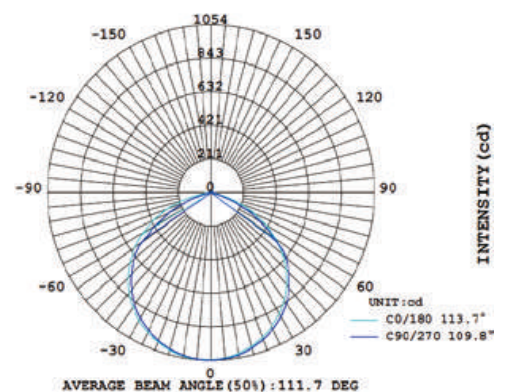

THE MEASURE OF A PRO™

LED FLOOD LIGHT

SXIMFL04-100W6K



LED luminaire for outdoor floodlights, slim, modern and resistant design, aluminum chassis, uniform light projection, reduces energy consumption and maintenance costs, surface mounting with metal bracket. The luminaire includes a breather valve that dissipates moisture.

FEATURES

- Powerful and ideal for working at heights
- IP 65
- No UV emissions
- High uniform lighting

APPLICATION

- Residential
- Sidewalks
- Squares
- Airport
- External Perimeter
- High Altitudes



IP65



SPECIFICATIONS

Model	Power	Light Tone	Luminous Flux	Dimensions (LxWxH)	Use
SXIMFL04-100W3K	100W	3000K	10000Lm	260x188x25mm	Indoor / Outdoor
SXIMFL04-100W6K	100W	6000K	10000Lm	260x188x25mm	Indoor / Outdoor

OPTICAL DATA

Type of Distribution	Direct Symmetrical
Beam Angle	110°
Connector	Plastic Injected Connector
Life Span	15 000 Hrs


PHYSICAL DATA

Finish	Black
Protection Level - IP	IP65
Type of Installation	Wall or Ceiling Mount
Body Frame	Aluminium
Optical Material	Tempered Glass


ELECTRICAL DATA

Power Selectable	NO
Operating Voltage	100-277 V
Frequency	50-60 Hz
Power Rating	>0.90
CRI	80
Dimmable	NO

DIMENSIONS

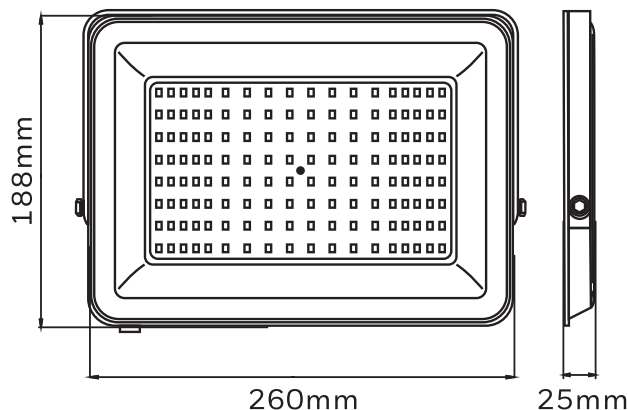


LUMINOUS INTENSITY DISTRIBUTION

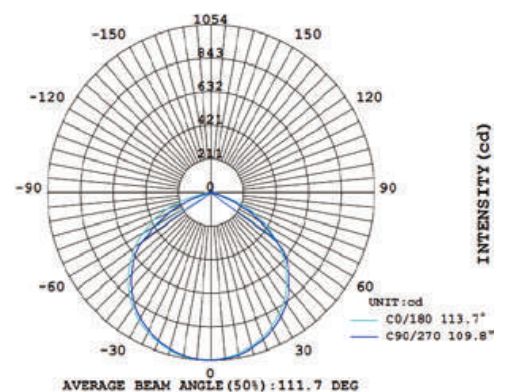

THE MEASURE OF A PRO™

LED FLOOD LIGHT

SXIMFL04-200W6K

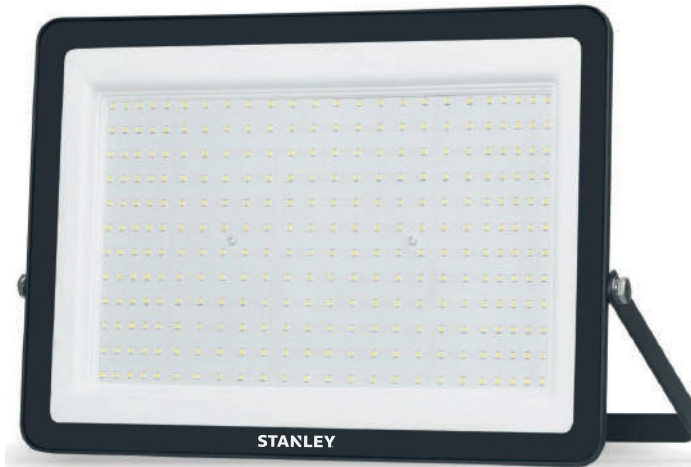

LED luminaire for outdoor floodlights, slim, modern and resistant design, aluminum chassis, uniform light projection, reduces energy consumption and maintenance costs, surface mounting with metal bracket. The luminaire includes a breather valve that dissipates moisture.

FEATURES

- Powerful and ideal for working at heights
- IP 65
- No UV emissions
- High uniform lighting

APPLICATION

- Residential
- Sidewalks
- Squares
- Airport
- External Perimeter
- High Altitudes



**Water
Proof**

IP 65



**Indoor
Outdoor**



**Easy
Installation**

SPECIFICATIONS

Model	Power	Light Tone	Luminous Flux	Dimensions (LxWxH)	Use
SXIMFL04-200W6K	200W	6000K	20000Lm	380x263x25mm	Indoor / Outdoor

OPTICAL DATA

Type of Distribution	Direct Symmetrical
Beam Angle	110°
Connector	Plastic Injected Connector
Life Span	50 000 Hrs


PHYSICAL DATA

Finish	Black
Protection Level - IP	IP65
Type of Installation	Wall or Ceiling Mou
Body Frame	Aluminium
Optical Material	Tempered Glass


ELECTRICAL DATA

Power Selectable	NO
Operating Voltage	100-277 V
Frequency	50-60 Hz
Power Rating	>0.90
CRI	80
Dimmable	NO

DIMENSIONS

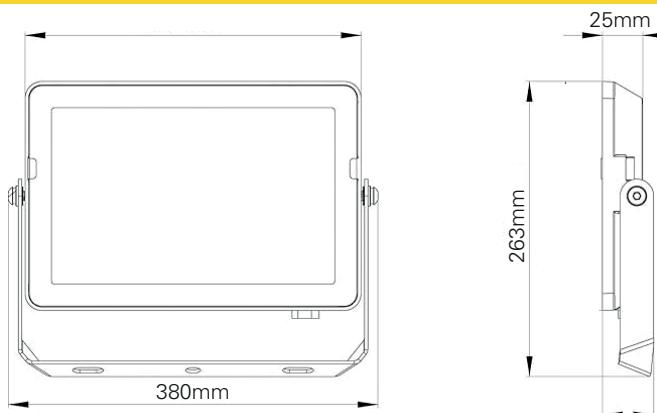


LUMINOUS INTENSITY DISTRIBUTION

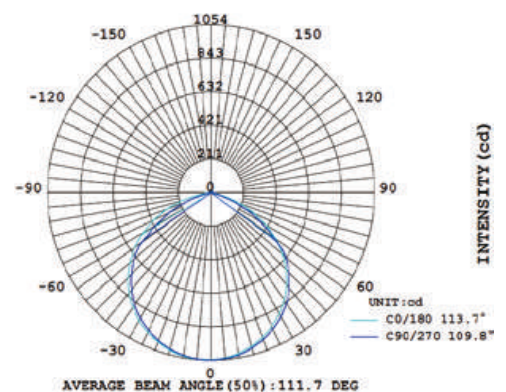

THE MEASURE OF A PRO™

LED FLOOD LIGHT

SXIMFL04-300W6K

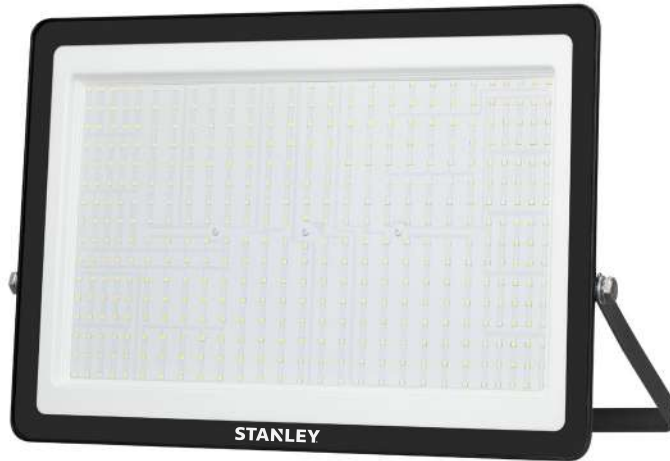

LED luminaire for outdoor floodlights, slim, modern and resistant design, aluminum chassis, uniform light projection, reduces energy consumption and maintenance costs, surface mounting with metal bracket. The luminaire includes a breather valve that dissipates moisture.

FEATURES

- Powerful and ideal for working at heights
- IP 65
- No UV emissions
- High uniform lighting

APPLICATION

- Residential
- Sidewalks
- Squares
- Airport
- External Perimeter
- High Altitudes



**Water
Proof**

IP 65



**Indoor
Outdoor**



**Easy
Installation**

SPECIFICATIONS

Model	Power	Light Tone	Luminous Flux	Dimensions (LxWxH)	Use
SXIMFL0-300W6K	300W	6000K	30000Lm	485x315x25mm	Indoor / Outdoor

OPTICAL DATA

Type of Distribution	Direct Symmetrical
Beam Angle	110°
Connector	Plastic Injected Connector
Life Span	50 000 Hrs


PHYSICAL DATA

Finish	Black
Protection Level - IP	IP65
Type of Installation	Wall or Ceiling Mount
Body Frame	Aluminium
Optical Material	Tempered Glass


ELECTRICAL DATA

Power Selectable	NO
Operating Voltage	100-277 V
Frequency	50-60 Hz
Power Rating	>0.90
CRI	80
Dimmable	NO

DIMENSIONS

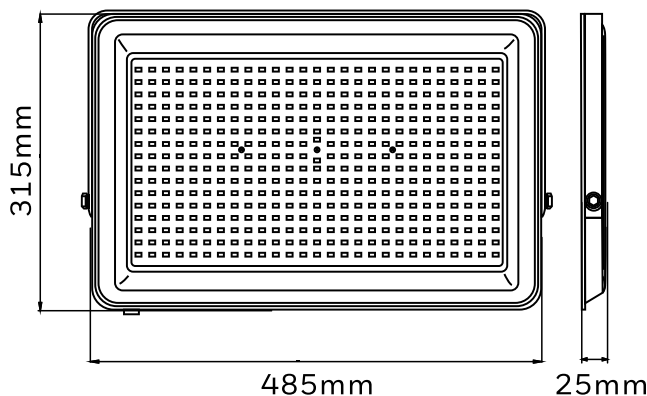

LUMINOUS INTENSITY DISTRIBUTION

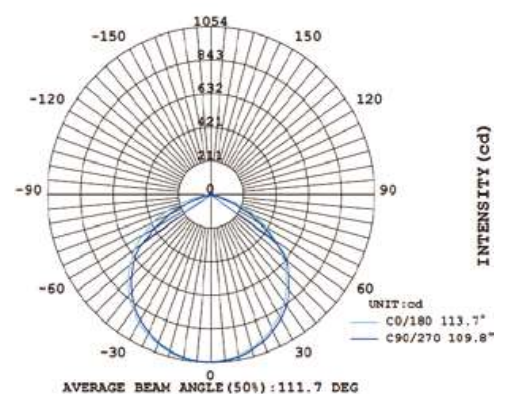

THE MEASURE OF A PRO™

LED FLOOD LIGHT

SXIMFL04-50W3K / 6K



LED luminaire for outdoor floodlights, slim, modern and resistant design, aluminum chassis, uniform light projection, reduces energy consumption and maintenance costs, surface mounting with metal bracket. The luminaire includes a breather valve that dissipates moisture.

FEATURES

- Powerful and ideal for working at heights
- IP 65
- No UV emissions
- High uniform lighting

APPLICATION

- Residential
- Sidewalks
- Squares
- Airport
- External Perimeter
- High Altitudes



IP65



SPECIFICATIONS

Model	Power	Light Tone	Luminous Flux	Dimensions (LxWxH)	Use
SXIMFL04-50W3K	50W	3000K	50000Lm	175x128x25mm	Indoor / Outdoor
SXIMFL04-50W6K	50W	6000K	50000Lm	175x128x25mm	Indoor / Outdoor

OPTICAL DATA

Type of Distribution	Direct Symmetrical
Beam Angle	110°
Connector	Plastic Injected Connector
Life Span	50 000 Hrs


PHYSICAL DATA

Finish	Black
Protection Level - IP	IP65
Type of Installation	Wall or Ceiling Mount
Body Frame	Aluminium
Optical Material	Tempered Glass


ELECTRICAL DATA

Power Selectable	NO
Operating Voltage	100-277 V
Frequency	50-60 Hz
Power Rating	>0.90
CRI	80
Dimmable	NO

DIMENSIONS

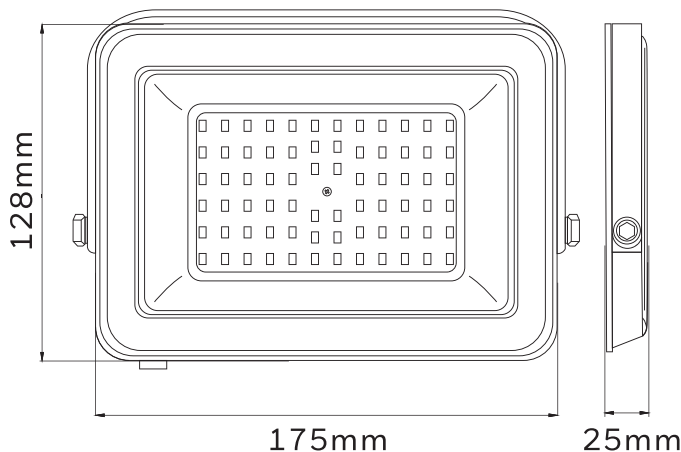

LUMINOUS INTENSITY DISTRIBUTION

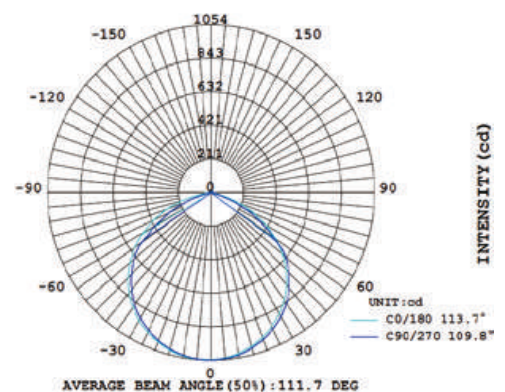

THE MEASURE OF A PRO™

LED FLOOD LIGHT

SXIMFL05-5006K



LED luminaire for outdoor floodlights, slim, modern and resistant design, aluminum chassis, uniform light projection, reduces energy consumption and maintenance costs, surface mounting with metal bracket. The luminaire includes a breather valve that dissipates moisture.

FEATURES

- Powerful and ideal for working at heights
- IP 65
- No UV emissions
- High uniform lighting

APPLICATION

- Residential
- Sidewalks
- Squares
- Airport
- External Perimeter
- High Altitudes



**Water
Proof**

IP 65



**Indoor
Outdoor**



**Easy
Installation**

SPECIFICATIONS

Model	Power	Light Tone	Luminous Flux	Dimensions (LxWxH)	Use
SXIMFL05-5006K	500W	6000K	67000Lm	580x460x62mm	Indoor / Outdoor

OPTICAL DATA

Type of Distribution	Direct Symmetrical
Beam Angle	110°
Connector	Plastic Injected Connector
Life Span	50 000 Hrs


PHYSICAL DATA

Finish	Black
Protection Level - IP	IP65
Type of Installation	Wall or Ceiling Mount
Body Frame	Aluminium
Optical Material	Tempered Glass


ELECTRICAL DATA

Power Selectable	NO
Operating Voltage	100-277 V
Frequency	50-60 Hz
Power Rating	>0.90
CRI	80
Dimmable	NO

DIMENSIONS

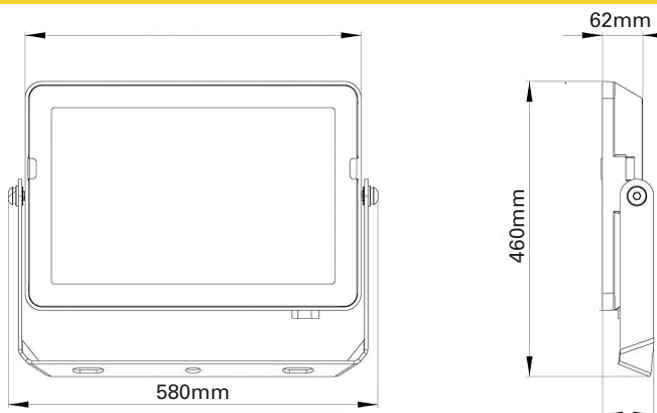

LUMINOUS INTENSITY DISTRIBUTION

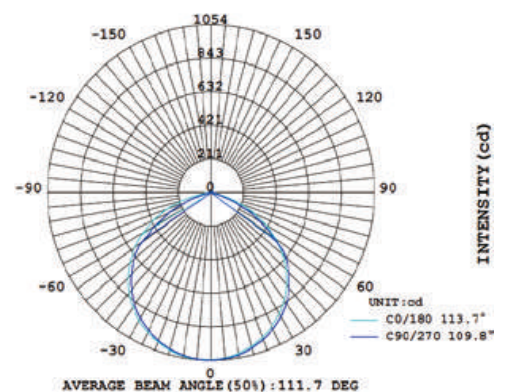

THE MEASURE OF A PRO™

LED WORKLIGHT

SXIMFL11-100W65K



High-performance dual-head LED tripod work light designed for maximum illumination in large work areas. Built with durable aluminum housing and tempered glass, it delivers powerful, uniform lighting for demanding indoor and outdoor applications.

FEATURES

- Dual-head design for wider light coverage
- High output 10,000 lumens
- Adjustable tripod for height and angle flexibility
- IP65 protection for outdoor use
- Durable aluminum construction
- Ideal for construction and industrial environments

APPLICATIONS

- Construction Sites
- Storage & Warehouse Operations
- Workshops & Garages
- Outdoor Projects
- Industrial Maintenance



IP65



SPECIFICATIONS

Model	Power	Light Tone	Luminous Flux	Dimensions (LxWxH)	Use
SXIMFL11-100W65K	50W x 2	6500K	10,000 Lm	1710x770x670mm	Indoor / Outdoor

OPTICAL DATA

CCT Switchable	No
Type of Distribution	Direct Symmetrical
Light Source	SMD
Reflector	Blister
Beam Angle	>105°
Cable Size	1mm ²




PHYSICAL DATA

Finish	Black & Yellow
Protection Level - IP	IP65
Body Material	Aluminium
Optical Material	Glass
Type of installation	Tripod / Portable

ELECTRICAL DATA

Operating Voltage	110-240V
Frequency	50-60 Hz
Power Rating	>0.90
CRI	80
Dimmable	No

DIMENSIONS

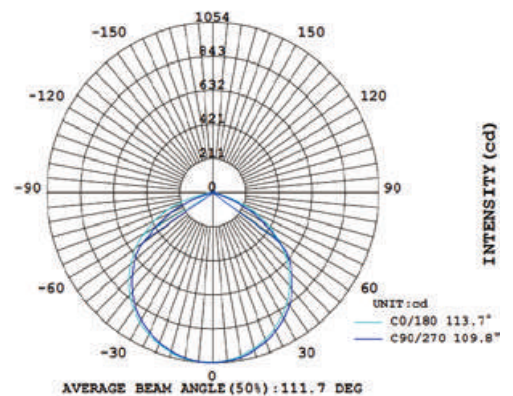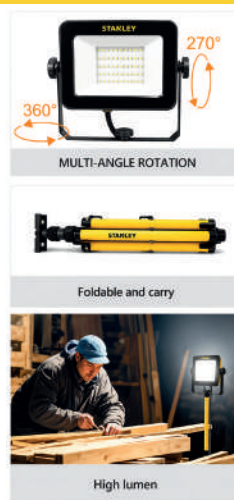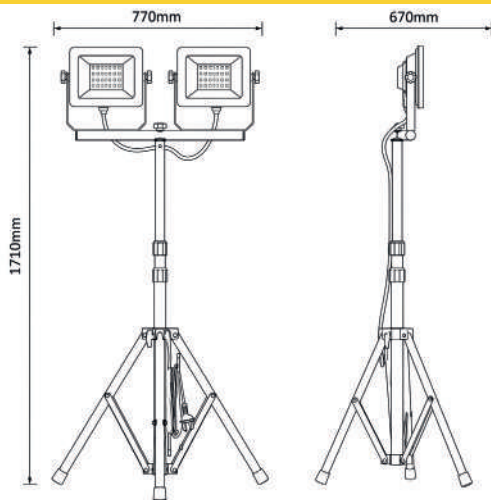

THE MEASURE OF A PRO™

LED WORKLIGHT

SXIMFL22-30W65K



High-performance LED work light designed for durability and efficiency. Built with an aluminum housing and tempered glass cover, it delivers powerful and uniform illumination for demanding indoor and outdoor applications.

FEATURES

- Powerful illumination for professional use
- IP65 protection against dust and water
- High uniform lighting output
- Durable aluminum body construction
- Ideal for indoor & outdoor applications

APPLICATIONS

- Construction Sites
- Workshops & Garages
- Industrial Maintenance
- Storage & Warehouse Operations
- Outdoor Projects



IP65



SPECIFICATIONS

Model	Power	Light Tone	Luminous Flux	Dimensions (LxWxH)	Use
SXIMFL22-30W65K	30W	6500K	3000 Lm	196x165x245mm	Indoor / Outdoor

OPTICAL DATA

CCT Switchable	No
Type of Distribution	Direct, Symmetrical
Light Source	SMD
Reflector	Blister



PHYSICAL DATA

Finish	Black & Yellow
Protection Level - IP	IP65
Body Material	Aluminium
Optical Material	Glass
Cable Size	1.5m H05 3x1mm ² with US plug
Type of Installation	Portable

ELECTRICAL DATA

Operating Voltage	AC110–240V
Frequency	50-60 Hz
Dimmable	No

DIMENSIONS

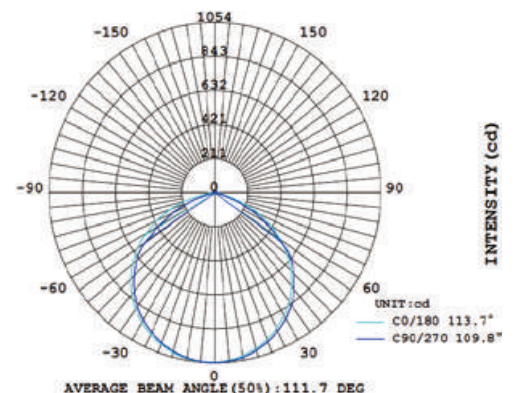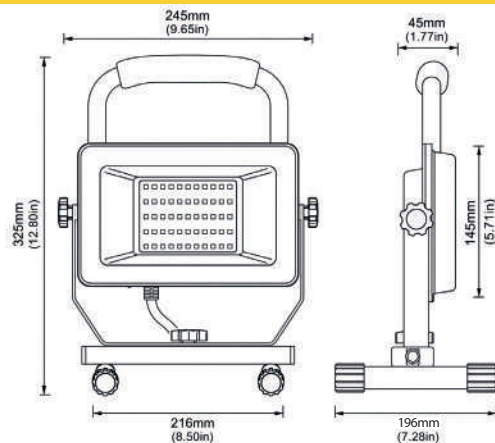

THE MEASURE OF A PRO™

LED WORKLIGHT

FATMAX

SXIMFL26-20W65K



Compact and durable LED work light designed for reliable performance in demanding environments. Featuring high-efficiency illumination, rechargeable battery, and adjustable stand for versatile indoor and outdoor use. Built to deliver consistent brightness while reducing energy consumption.

FEATURES

- High-efficiency LED output: 2000lm / 1000lm
- Dimmable brightness: 50% – 100% – Off
- Fast charging via Type-C (5V 2A)
- Durable and compact design for indoor & outdoor use
- Adjustable stand for flexible light direction
- IP54 protection against dust and splashes



IP54



SPECIFICATIONS

Model	Power	Light Tone	Luminous Flux	Dimensions (LxWxH)	Use
SXIMFL26-20W65K	20W	6500K	2000 Lm / 1000 Lm	205x150x45mm	Indoor / Outdoor

OPTICAL DATA

CCT Switchable	YES
Type of Distribution	Direct Symmetrical
Charging Input	5V 2A Fast Charging
Charging Time	3 Hrs
Battery Capacity	3.7V 4400mAh


PHYSICAL DATA

Finish	Black & Yellow
Protection Level - IP	IP54
Body Material	Aluminium
Optical Material	Tempered Glass
Operation Temperature	-20°C to +40°C


ELECTRICAL DATA

Operating Voltage	120-277 V
Frequency	50-60 Hz
Power Rating	>0.90
CRI	80
Dimmable	YES
Brightness Dimmable	50%-100%-Off

DIMENSIONS

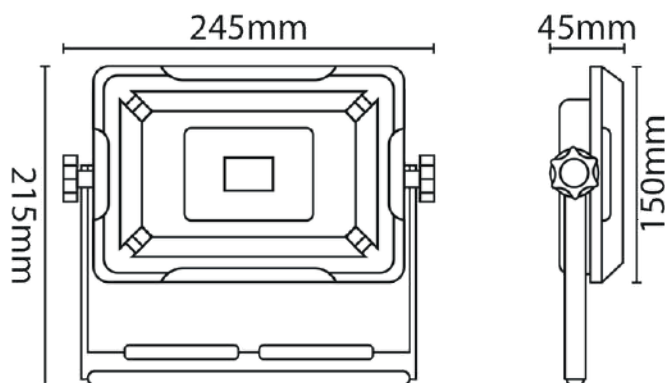

LUMINOUS INTENSITY DISTRIBUTION

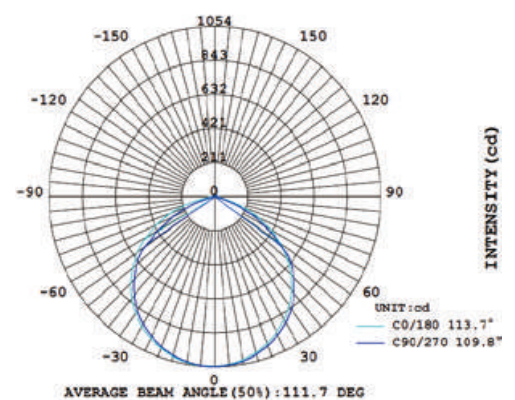

THE MEASURE OF A PRO™

LED TRI-PROOF LIGHT CCT

SXIMTRI01-18WCT/36WCT



High-performance waterproof LED tri-proof tube with PC + Aluminum housing. Designed for industrial and commercial environments requiring durability and efficiency.

FEATURES

- PC + Aluminum Waterproof Construction
- IP65 Protection
- 3CCT Selectable (3000K / 4000K / 6500K)
- Surface Mounted Installation
- High Durability for Industrial Use
- Corrosion Resistant Housing

APPLICATION

- Warehouses
- Parking Areas
- Industrial Facilities
- Commercial Buildings
- Humid Environments



LED

IP65



OPTICAL DATA

Color Temperature (CCT)	3000K, 4000K, 6500K
Beam Angle	120°
Type of Distribution	Direct Symmetrical
Luminous Flux	1800 lm (18W model)
	3600 lm (36W model)


PHYSICAL DATA

Finish	White
Protection Level - IP/IK	IP65
Type of Installation	Ceiling Mountable
Body Frame	PC+Aluminum
Dimensions	0.6m (18W)
	1.2m (36W)


ELECTRICAL DATA

Operating Voltage	100-277V
Frequency	50-60 Hz
Power Rating	> 0.50
CRI	80
Input Power	18W
	36W

DIMENSIONS

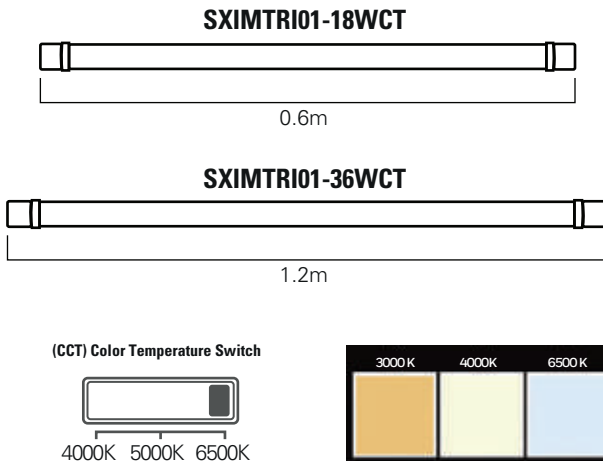

LUMINOUS INTENSITY DISTRIBUTION

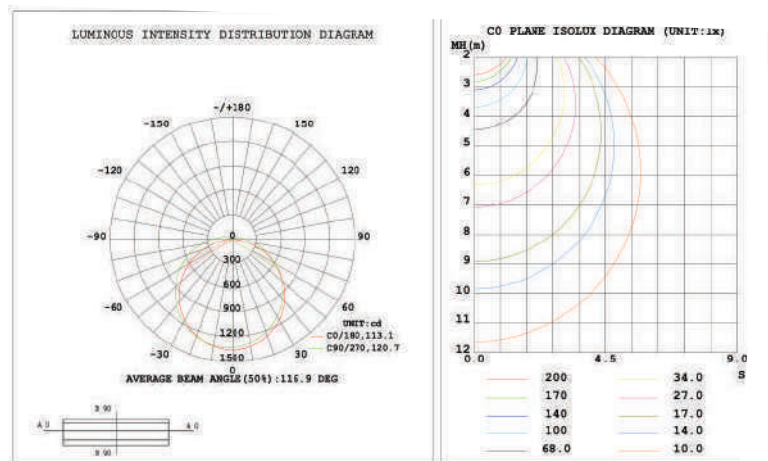


THE MEASURE OF A PRO™

LED TRI-PROOF LIGHT

FATMAX®

SXIMTRI02-PS-CCT

High-performance industrial LED luminaire with multi-wattage and 3CCT selectable technology. Designed for commercial and industrial applications requiring flexibility and efficiency.

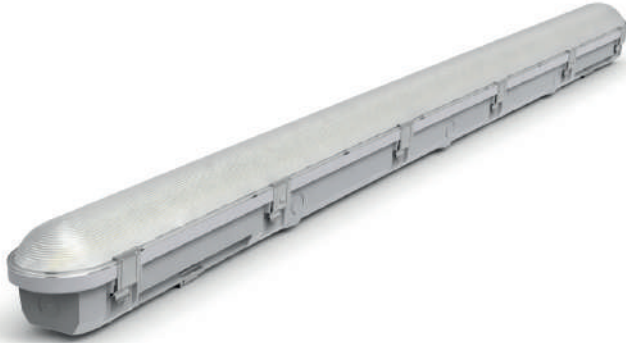

FEATURES

- 4-Level Power Selectable: 35W / 42W / 50W / 60W
- 3CCT Selectable: 3000K / 4000K / 6500K
- Wide Voltage Range: AC100-277V
- High efficiency LED system
- Durable industrial construction
- Surface mounting installation

APPLICATION

- Industrial Areas
- Sidewalks
- Parks
- Schools
- And Others



LED



**Multi Wattage
Switchable**



**Eco
Friendly**

UV Protection



**Easy
Installation**

OPTICAL DATA

Color Temperature (CCT)	3000K, 4000K, 6500K
Luminous Flux	6870 Lm, 6000Lm
	5109 Lm, 4092Lm
Beam Angle	120°
Type of Distribution	Direct Symmetrical
Opening Angle	80


PHYSICAL DATA

Finish	Gray & White
Protection Level - IP	IP65
Dimensions (LxWxH)	1200x96x83mm
Type of Installation	Surface Mounted
Body Frame	PC
Optical Material	Diffuser PC
Operation Temperature	-20°C to +40°C


ELECTRICAL DATA

Input Power	35W, 42W, 50W, 60W
Power Switchable	YES
Operating Voltage	100-277 V
Frequency	50-60 Hz
Power Factor	>0.9
CRI	80
Dimmable	NO


DIMENSIONS

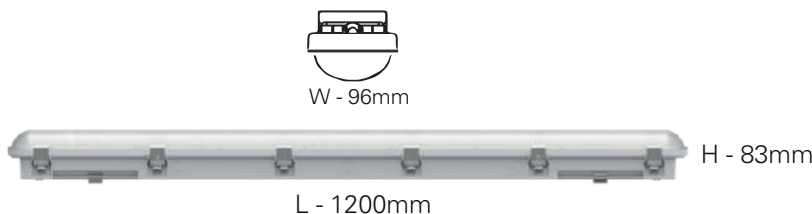

(CCT) Color Temperature Switch



LUMINOUS INTENSITY DISTRIBUTION

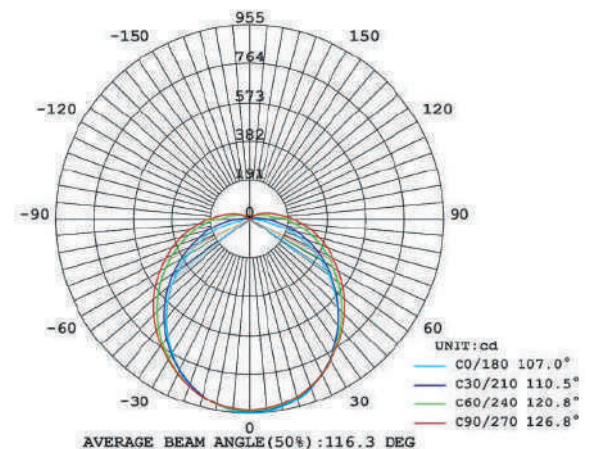

THE MEASURE OF A PRO™

LED TRI-PROOF LIGHT

FATMAX®

SXIMTRI03-PS-65K



Hermetic industrial luminaire, clipless design, smooth and elegant appearance, no need to open the diffuser to connect with safe and reliable protection level
Switchable power: 30W, 40W or 50W.

FEATURES

- UV protection
- Built in high luminous efficiency LED Chip and Driver
- IP65/IK08
- 3 Level Power Switchable
- Fast connection
- Light Efficiency: 100-118lm/ W

APPLICATION

- Industrial Areas
- Schools
- Sidewalks
- And Others
- Parks



LED



**Multi Wattage
Switchable**



**Eco
Friendly**

UV Protection



**Easy
Installation**

OPTICAL DATA

Color Temperature (CCT)	6500K
Luminous Flux	3540,4280,5170 Lm
Beam Angle	120°
Type of Distribution	Direct Symmetrical
Opening Angle	80
Efficiency	100-118 Lm /W


PHYSICAL DATA

Finish	Gray & White
Protection Level - IP	IP65
Dimensions (LxWxH)	1200x70x56 mm
Type of Installation	Surface Mounted
Body Frame	PC
Optical Material	Diffuser PC
Operation Temperature	-20°C to +40°C

ELECTRICAL DATA

Input Power	30W, 40W, 50W
Power Switchable	YES
Operating Voltage	100-277 V
Frequency	50-60 Hz
Power Factor	>0.9
CRI	80
Dimmable	NO

DIMENSIONS



W - 70mm




H - 56mm



L - 1200mm




30W 40W 50W



Power Selectable Switch

LUMINOUS INTENSITY DISTRIBUTION

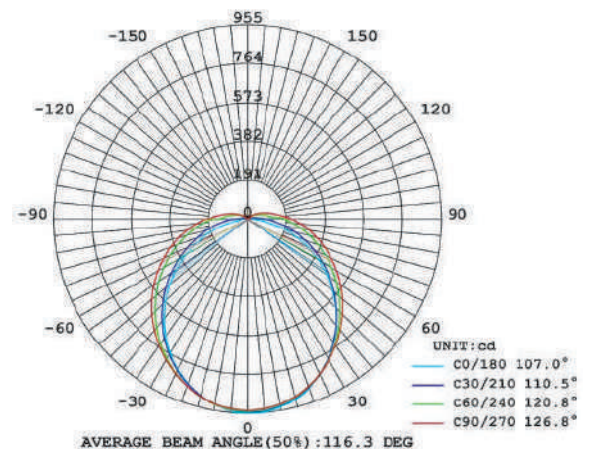

THE MEASURE OF A PRO™

LED TRI-PROOF LIGHT

SXIMTRI04-18W65K/36W65K



TRI-04-18W-65K



TRI-04-36W-65K

The LED Tri-Proof Light IP20 is a reliable and efficient indoor lighting solution designed for durability and performance. With selectable power options of 18W and 36W, and a consistent light color temperature of 6500K, it provides bright, uniform illumination ideal for commercial and residential spaces.

FEATURES

- High luminous efficiency LED chip and driver.
- Available in 18W and 36W.
- Fixed CCT: 6500K daylight.
- Long lifespan, energy-saving, eco-friendly.

APPLICATION

- Residential Areas
- Schools
- Retail stores and supermarkets.
- And others



LED



Indoor



Save Money



Easy Installation



Eco Friendly

OPTICAL DATA

Color Temperature (CCT)	6500K
Beam Angle	120°
Type of Distribution	Direct Symmetrical

TRI-04-18W TRI-04-36W

Luminous Flux

2000 lm	4000 lm
---------	---------

PHYSICAL DATA

Finish	White
Protection Level - IP/IK	IP20
Type of Installation	Ceiling Mountable
Body Frame	PC
Optical Material	Diffuser PC
Operation Temperature	-20°C to +40°C

TRI-04-18W TRI-04-36W

Dimensions

600 X 75 X 25mm	1200 X 75 X 25mm
-----------------	------------------

ELECTRICAL DATA


Operating Voltage	100-277V
Frequency	50-60 Hz
Power Rating	> 0.50

TRI-04-18W TRI-04-36W


Input Power

18W	36W
-----	-----

DIMENSIONS




TRI-04-18



TRI-04-36

LUMINOUS INTENSITY DISTRIBUTION

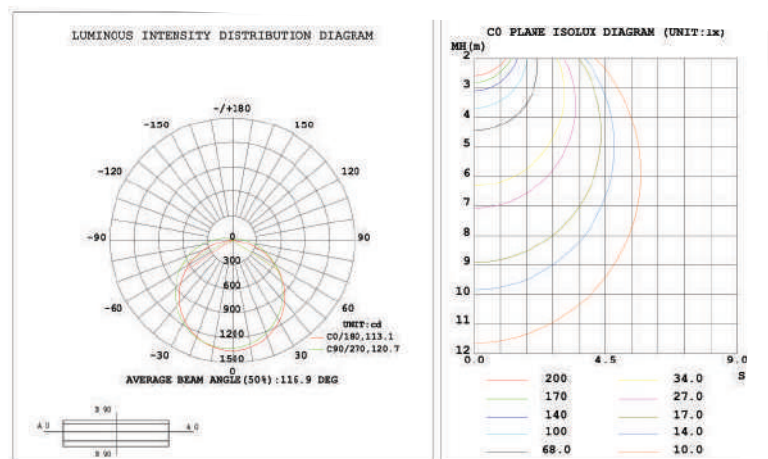

THE MEASURE OF A PRO™

STANLEY®



EXTENSION CORDS & POWER STRIPS

©2026 Stanley Black & Decker, Inc. Stanley® and the Stanley/ logo are trademarks of Stanley Black & Decker, Inc. or an affiliate thereof and are used under license. Manufactured by Lighting & Hardware Distribution Inc., Panama Headquarters, 1 (888) 502-8432, www.lightingandhardware.com

STANLEY®

INDOOR & OUTDOOR HEAVY DUTY EXTENSION CORD

SXIM-E-01



25'
FEET

50'
FEET

100'
FEET

BENEFITS:

- Extend range of outlets.
- Useful for light to medium duty items.
- Easy to install and move.
- They allow you to use tools in the workshop.
- Ideal for landscaping.
- Long lifespan.

HIGHLY VISIBLE

Yellow jacket provides extra safety and prevents tripping while working in the yard.

COMMON USES

Ideal for landscaping and powering appliances such as a shop vac, weed wacker, bush trimmer, leaf blower and electric lawn mower.



AVAILABLE OPTIONS

SXIM-E-01-25FT

SXIM-E-01-50FT

SXIM-E-01-100FT

ENERGY INFORMATION

	SXIM-E-01-25FT	SXIM-E-01-50FT	SXIM-E-01-100FT
Max Power:	1625W	1625W	1250W
Voltage/Hz:	125V / 50-60HZ	125V / 50-60HZ	125V / 50-60HZ
Current:	13A	13A	10A

DIMENSIONS



ADDITIONAL INFORMATION

No. of Outlet Plug:	1
Finish:	Yellow
Certificate:	ETL
Specification:	16 GAUGE / 3-pronged
Material:	Copper, PVC
Size:	25/50/100 ft



THE MEASURE OF A PRO™

EXTENSION CORD

SXIM-E-02



25'
FEET

50'
FEET

100'
FEET

BENEFITS:

- Extends range of outlets.
- Ideal for light to medium duty applications.
- Flexible and durable cable jacket.
- Easy to install and move.
- Provides safe and stable power connection.
- Long service lifespan.

HIGHLY VISIBLE

Yellow jacket provides extra visibility and safety, reducing tripping risks in work areas, construction sites, and outdoor environments.

COMMON USES

Ideal for powering light-duty appliances and tools such as:

- Home equipment
- Garden tools
- Power tools
- Shop vacs
- Leaf blowers
- Weed trimmers
- Indoor & outdoor temporary connections.



AVAILABLE OPTIONS

SXIM-E-02-25FT


SXIM-E-02-50FT

SXIM-E-02-100FT

ENERGY INFORMATION

	SXIM-E-02-25FT	SXIM-E-02-50FT	SXIM-E-02-100FT
Max Power:	1625W	1625W	1250W
Voltage/Hz:	125V / 50-60HZ	125V / 50-60HZ	125V / 50-60HZ
Current:	13A	13A	10A

DIMENSIONS

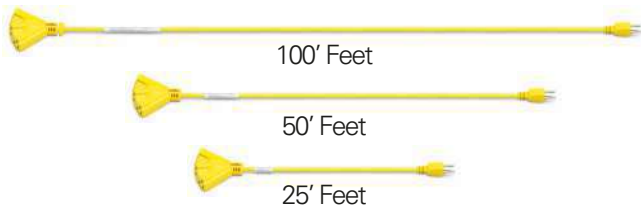

ADDITIONAL INFORMATION

No. of Outlet Plug:	3
Certificate:	ETL
Specification:	16 GAUGE / 3-pronged
Material:	Copper, PVC
Finish:	Yellow
Size:	25/50/100 ft



THE MEASURE OF A PRO™

POWER STRIP WITH LIGHTED SWITCH ON/OFF

SXIM-E-03



BENEFITS:

- 8 grounded outlets for extended connectivity.
- Ideal for home, office, garage or workshop use.
- Easy wall mounting with horizontal or vertical keyholes.
- Compact and practical design.
- ETL certified for safety and reliability.

8 OUTLETS

Industrial-style design with 8 total outlets. Optimized spacing allows connection of multiple plugs at once. Heavy-duty cord for reliable performance.

COMMON USES

Perfect for powering multiple devices such as:

- Power tools
- Computers and office equipment
- Home appliances
- Garage or workshop equipment



AVAILABLE OPTIONS

SXIM-E-03

ENERGY INFORMATION

Voltage/Hz: 125V / 50-60Hz

Current: 15A

Surge Protect: 300J

ADDITIONAL INFORMATION

No. of Outlet Plug: 8 Outlets

Finish: White

Specification: 14AWG * 3C / SJT / 3FT

Certificate: ETL


Material: Copper, Plastic



THE MEASURE OF A PRO™

WALL TAP

SXIM-E-04

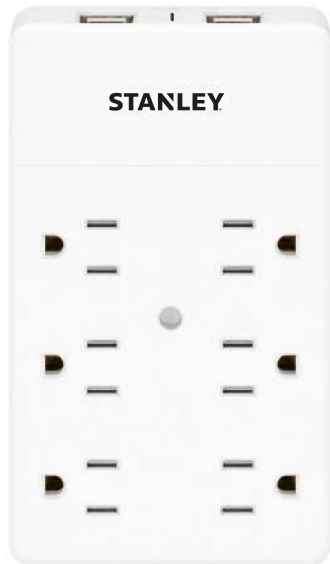

BENEFITS:

- 6 grounded AC outlets for multiple devices.
- Integrated USB-A and USB-C fast charging ports.
- 1200 Joules surge protection for enhanced safety.
- Ideal for home, office and workstation setups.
- ETL certified for electrical safety.
- Space-saving vertical design.

OUTLET CONFIGURATION

- 6 grounded 3-prong AC outlets.
- 2 USB-A port.
- 1 USB-C port.

Optimized spacing allows multiple plugs simultaneously.

OUTLET CONFIGURATION

USB-A Output: 5Vdc 2.4A

USB-C Output: 5Vdc 3.0A

USB-A + USB-C (simultaneous use): 5Vdc 3.4A total



AVAILABLE OPTIONS

SXIM-E-04

ENERGY INFORMATION

Max Power: 1875W

Voltage/Hz: 125V / 50-60Hz

Current: 15A

Surge Protect: 1200J

ADDITIONAL INFORMATION

No. of Outlet Plug: 6 Outlets

USB Ports: 2 USB-A + 1 USB-C

Finish: White

Certificate: ETL


Material: Copper, Plastic



THE MEASURE OF A PRO™

POWER STRIP WITH LIGHTED SWITCH ON/OFF

SXIM-E-05

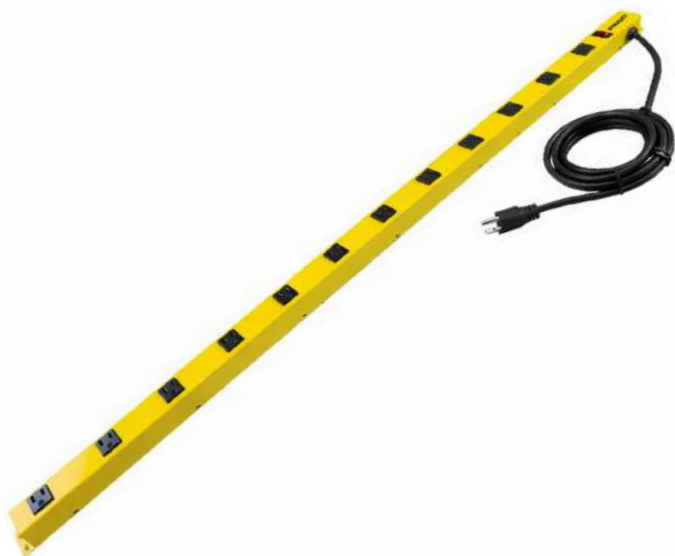

BENEFITS:

- 12 grounded outlets for extended connectivity.
- Ideal for home, office, garage or workshop use.
- Easy wall mounting with horizontal or vertical keyholes.
- Compact and practical design.
- ETL certified for safety and reliability.

12 OUTLETS

Industrial-style design with 12 total outlets. Optimized spacing allows connection of multiple plugs at once. Heavy-duty cord for reliable performance.

COMMON USES

Perfect for powering multiple devices such as:

- Power tools
- Computers and office equipment
- Home appliances
- Garage or workshop equipment



AVAILABLE OPTIONS

SXIM-E-05

ENERGY INFORMATION

Voltage/Hz: 125V / 50-60Hz
Current: 15A

ADDITIONAL INFORMATION

No. of Outlet Plug:	12 Outlets
Finish:	Yellow & Black
Specification:	14AWG * 3C / SJT / 3FT
Certificate:	ETL
Material:	Iron, Plastic



THE MEASURE OF A PRO™

POWER STRIP WITH LIGHTED SWITCH ON/OFF

SXIM-E-06



BENEFITS:

- Extend range of outlets.
- Useful for light to medium duty items.
- Easy to install and move.
- Allow to operate multiple tools in the garage or workbench.
- Long lifespan.

6 OUTLETS

Industrial look and ruggedly designed with 4 compact outlets and 2 wide spacing outlets. Cord holder design for wrap the cord, with two horizontal or vertical mounting keyholes.

6
OUTLET

3'
FEET

14
GAUGE



AVAILABLE OPTIONS

SXIM-E-06

ENERGY INFORMATION

Max Power: 1875W
Voltage/Hz: 125V / 50-60Hz
Current: 15A
Surge Protect: 90J

ADDITIONAL INFORMATION

No. of Outlet Plug: 6 Outlets
Finish: Black & Yellow
Specification: 14AWG * 3C / SJT / 3FT
Certificate: ETL
Material: Iron, Plastic



THE MEASURE OF A PRO™

POWER STRIP WITH LIGHTED SWITCH ON/OFF

SXIM-E-07



BENEFITS:

- 8 grounded outlets for extended connectivity.
- Ideal for home, office, garage or workshop use.
- Easy wall mounting with vertical keyholes.
- Compact and practical design.
- ETL certified for safety and reliability.

8 OUTLETS

Industrial-style design with 8 total outlets. Optimized spacing allows connection of multiple plugs at once. Heavy-duty cord for reliable performance.

COMMON USES

Perfect for powering multiple devices such as:

- Power tools
- Computers and office equipment
- Home appliances
- Garage or workshop equipment



AVAILABLE OPTIONS

SXIM-E-07

ENERGY INFORMATION

Voltage/Hz:	125V / 50-60Hz
Current:	15A
Surge Protect:	350J

ADDITIONAL INFORMATION

No. of Outlet Plug:	8 Outlets
Finish:	White
Specification:	14AWG * 3C / SJT / 3FT
Certificate:	ETL
Material:	Copper, Plastic



THE MEASURE OF A PRO™

POWER STRIP WITH LIGHTED SWITCH ON/OFF

SXIM-E-08



BENEFITS:

- 6 grounded outlets for extended connectivity.
- Ideal for home, office, garage or workshop use.
- Easy wall mounting with vertical keyholes.
- Compact and practical design.
- ETL certified for safety and reliability.

6 OUTLETS

Industrial-style design with 6 total outlets. Optimized spacing allows connection of multiple plugs at once. Heavy-duty cord for reliable performance.

COMMON USES

Perfect for powering multiple devices such as:

- Power tools
- Computers and office equipment
- Home appliances
- Garage or workshop equipment



AVAILABLE OPTIONS

SXIM-E-08

ENERGY INFORMATION

Voltage/Hz: 125V / 50-60Hz

Current: 15A

Surge Protect: 90J

ADDITIONAL INFORMATION

No. of Outlet Plug: 6 Outlets

Finish: White

Specification: 14AWG * 3C / SJT / 3FT

Certificate: ETL

Material: Copper, Plastic



THE MEASURE OF A PRO™

POWER STRIP WITH LIGHTED SWITCH ON/OFF

SXIM-E-09-BK



BENEFITS:

- 4 grounded outlets for extended connectivity.
- Ideal for home, office, garage or workshop use.
- Easy wall mounting with vertical keyholes.
- Compact and practical design.
- ETL certified for safety and reliability.

4 OUTLETS

Optimized spacing allows connection of multiple plugs at once. Heavy-duty cord for reliable performance.

COMMON USES

Perfect for powering multiple devices such as:

- Power tools
- Computers and office equipment
- Home appliances
- Garage or workshop equipment



AVAILABLE OPTIONS

SXIM-E-09-BK

ENERGY INFORMATION

Voltage/Hz:	125V / 50-60Hz
Current:	15A
Surge Protect:	90J

ADDITIONAL INFORMATION

No. of Outlet Plug:	4 Outlets
Finish:	Black
Specification:	14AWG * 3C / SJT / 3FT
Certificate:	ETL
Material:	Copper, Plastic



THE MEASURE OF A PRO™

POWER STRIP WITH LIGHTED SWITCH ON/OFF

SXIM-E-10



BENEFITS:

- 8 grounded AC outlets for multiple devices.
- Integrated USB-A and USB-C fast charging ports.
- Ideal for home, office and workstation setups.
- ETL certified for electrical safety.
- Space-saving vertical design.

OUTLET CONFIGURATION

- 8 grounded 3-prong AC outlets.
- 2 USB-A port.
- 1 USB-C port.

OUTLET CONFIGURATION

USB-A Output: 5Vdc 2.4A

USB-C Output: 5Vdc 3.0A

USB-A + USB-C (simultaneous use): 5Vdc 3.4A total



AVAILABLE OPTIONS

SXIM-E-10

ENERGY INFORMATION

Voltage/Hz: 125V / 50-60Hz

Current: 15A

ADDITIONAL INFORMATION

No. of Outlet Plug:	8 Outlets
USB Ports:	2 USB-A + 1 USB-C
Finish:	White
Specification:	14AWG * 3C / SJT / 3FT
Certificate:	ETL
Material:	Copper, Plastic



THE MEASURE OF A PRO™

POWER STRIP WITH LIGHTED SWITCH ON/OFF

SXIM-E-13



BENEFITS:

Extends the number of available outlets.
Ideal for light- to medium-duty applications.
Easy to install and reposition.
Allows multiple devices to operate at home or in the office.
Long service life.

6 OUTLETS

This power strip features a lighted ON/OFF switch for easy power status indication (light on when power is on; light off when power is off). The built-in circuit breaker provides overload protection for enhanced safety.

COMMON USES

Ideal for entertainment centers, offices, and any space where multiple devices require power.



AVAILABLE OPTIONS

SXIM-E-13

ENERGY INFORMATION

Max Power	1875W
Voltage/Hz	125V
Current	15A

ADDITIONAL INFORMATION

No. of Outlet Plug	6-outlet
Finish	White
Specification	14AWG*3C/SJT
Certification	UL
Size	3 Ft



THE MEASURE OF A PRO™

POWER STRIP WITH LIGHTED SWITCH ON/OFF

SXIM-E-14



BENEFITS:

- Extend range of outlets.
- Useful for light to medium duty items.
- Easy to install and move.
- Allow to operate multiple devices at office or home.
- Long lifespan.

SPACE SAVING

Expanding your outlet can be sleek with this slim outlet adapter wall tap to power your devices.

POWER MORE

Turn 2 outlets into 6-Outlet Adapter that can power your home or office electronics.



AVAILABLE OPTIONS

SXIM-E-14

ENERGY INFORMATION

Max Power	1875W
Voltage/Hz	125V / 50-60Hz
Current	15A

ADDITIONAL INFORMATION

No. of Outlet Plug	6-outlet
Finish	White
Certificate	ETL



THE MEASURE OF A PRO™

3 OUTLET WALL SURGE PROTECTOR EXTENDER WITH 2 USB PORT

SXIM-E-15



BENEFITS:

- Extends the number of available outlets.
- Ideal for light- to medium-duty devices.
- Easy to install and move.
- Allows multiple devices to operate simultaneously at home or in the office.
- Long service life.

3 SURGE-PROTECTED OUTLETS

This outlet adapter features 3 surge-protected outlets and 2 USB charging ports that share 2.4A output, allowing you to power electronics and charge portable devices conveniently in one place. The 300J surge protection rating helps safeguard your equipment from power surges.

MULTI-FUNCTIONAL USB CHARGING STATION

Perfect for charging smartphones, tablets, and other rechargeable devices at home or while traveling.



AVAILABLE OPTIONS

SXIM-E-15

ENERGY INFORMATION

Max Power:	1875W
Surge Protect:	300J
Voltage/Hz:	125V / 50-60Hz
Current:	15A

ADDITIONAL INFORMATION

No. of Outlet Plug:	3 Outlets
Finish:	White
Specification:	2 USB DC5V / 2.4A total
Certificate:	UL
Material:	Copper, Plastic



THE MEASURE OF A PRO™

HEAVY DUTY EXTENSION CORD

FATMAX®

SXIM-E-11-50FT/100FT



BENEFITS:

- Extend range of outlets.
- Useful for light to medium duty items.
- Easy to install and move.
- They allow you to use tools in the or workshops.
- Ideal for landscaping.
- Long lifespan.

PRODUCT DESCRIPTION

Heavy-duty extension cord reel designed for safe and convenient indoor power distribution. Ideal for workshops, garages, and home use.

COMMON USES

Ideal for landscaping and powering appliances such as a shop vac, weed wacker, bush trimmer, leaf blower and electric lawn mower.

4
OUTLET

16
GAUGE

50'
FEET

OR

100'
FEET

IP20

AVAILABLE OPTIONS

SXIM-E-11-50FT

SXIM-E-11-100FT

ADDITIONAL INFORMATION

No. of Outlet Plug:	4
Finish:	Yellow & Black
Certificate:	ETL, CE
Specification:	16 GAUGE / 3-pronged
Material:	Metal
Size Extension Cord:	50 or 100 Ft

ENERGY INFORMATION

Max Power:	1250W
Voltage/Hz:	125V / 50-60HZ
Current:	10A



THE MEASURE OF A PRO™

INDOOR HEAVY DUTY EXTENSION CORD

FATMAX®

SXIM-E-12-40FT



BENEFITS

- 4 grounded outlets for multiple connections.
- Built-in thermal cut-out for overload protection.
- Durable PVC cable jacket for long-lasting performance.
- Compact reel design for easy storage and transport.
- Ideal for home, garage and light-duty workshop use.

OUTLET CONFIGURATION

4 grounded outlets (4-way).
Heavy-duty central hub design.
Easy cable rewind system.

CABLE SPECIFICATION

Cable Type: SJT
Wire Gauge: 16AWG / 3 Conductors
Jacket Material: PVC
Length: 40 ft



AVAILABLE OPTIONS

SXIM-E-12-40FT

ENERGY INFORMATION

Max Power:	1250W
Voltage/Hz:	125V / 50-60HZ
Current:	10A

ADDITIONAL INFORMATION

No. of Outlet Plug:	4
Finish:	Yellow & Black
Certificate:	ETL
Specification:	16 GAUGE / 3-pronged
Finish:	Copper, ABS
Size Extension Cord:	40 ft



THE MEASURE OF A PRO™

STANLEY®



VOLTAGE & SURGE PROTECTORS

©2026 Stanley Black & Decker, Inc. Stanley® and the Stanley/ logo are trademarks of Stanley Black & Decker, Inc. or an affiliate thereof and are used under license. Manufactured by Lighting & Hardware Distribution Inc., Panama Headquarters, 1 (888) 502-8432, www.lightingandhardware.com

VOLTAGE & SURGE PROTECTOR

FATMAX

SXIM-SP-01




PROTECTION FUNCTION

- Over / Under Voltage Protection.
- Phosphor copper parts.
- Flame retardant shell.

COMMON USES

A/C up to 60,000BTU, refrigerators, TV's, freezers, washing machines, water cooler, computers, coffee makers, microwaves, electric stoves, and multiple electronic devices.



- 01 Under voltage value adjustment knob
Perilla de ajuste del valor de Sobretenión
- 02 Over voltage value adjustment knob
Perilla de ajuste del valor de sobrepresión
- 03 Delay value adjustment knob
Botón de ajuste del valor de retraso
- 04 Power switch
Interrupción de alimentación
- 05 Input/output terminals
Terminales de entrada / salida

AVAILABLE OPTIONS:

SXIM-SP-01

PERFORMANCE PARAMETER

Finish: Black
Packing: Blister

ENERGY INFORMATION

Voltage: 220V
Frequency: 50/60Hz
Current: 40A
Max Loading: 8800W
Under voltage: 170V-210V
Over voltage: 220V-260V



THE MEASURE OF A PRO™

VOLTAGE & SURGE PROTECTOR

SXIM-SP-02

SXIM-SP-03



PROTECTION FUNCTION

- Over / Under Voltage Protection.
- Phosphor copper parts.
- Flame retardant shell.

COMMON USES

Refrigerators, TV's, freezers, washing machines, water cooler, computers, coffee makers.

A/C up to 18,000BTU (15Amp)

A/C up to 30,000BTU (20Amp)

ADDITIONAL FEATURES

- Power ON/OFF switch
- Rotatable plug up to 350°
- Easy installation design
- Space-saving format.



AVAILABLE OPTIONS:

SXIM-SP-02

SXIM-SP-03

PERFORMANCE PARAMETER

Finish: White

Packing: Blister

ENERGY INFORMATION

SXIM-SP-02

SXIM-SP-03

Voltage:

120V

220V

Frequency:

50/60Hz

50/60Hz

Current:

15A

20A

Max Loading:

1800W

4400W

Under voltage:

90-110V

130-180V

Over voltage:

120-140V

230-270V

Delay Time:

5s / 30s / 180s

THE MEASURE OF A PRO™

VOLTAGE PROTECTOR

SXIM-SP-04

SXIM-SP-05



PROTECTION FUNCTION

- Over / Under Voltage Protection.
- Phosphor copper parts.
- Flame retardant shell.

COMMON USES

Refrigerators, TVs, freezers, washing machines, water coolers, computers, coffee makers.

- A/C up to 18,000 BTU (120V Model)
- A/C up to 30,000 BTU (220V Model)

ADDITIONAL FEATURES

- Digital voltage display
- Adjustable protection settings
- Easy installation
- Space-saving compact design

AVAILABLE OPTIONS:

SXIM-SP-04

SXIM-SP-05

PERFORMANCE PARAMETER

Finish: White

Packing: Blister

ENERGY INFORMATION

SXIM-SP-04

SXIM-SP-05

Voltage:

120V

220V

Frequency:

50/60Hz

50/60Hz

Current:

15A

20A

Under voltage:

65-100V

150-210V


Over voltage:

120-165V

230-280V

Delay Time:

1-999 Seconds (Adjustable)

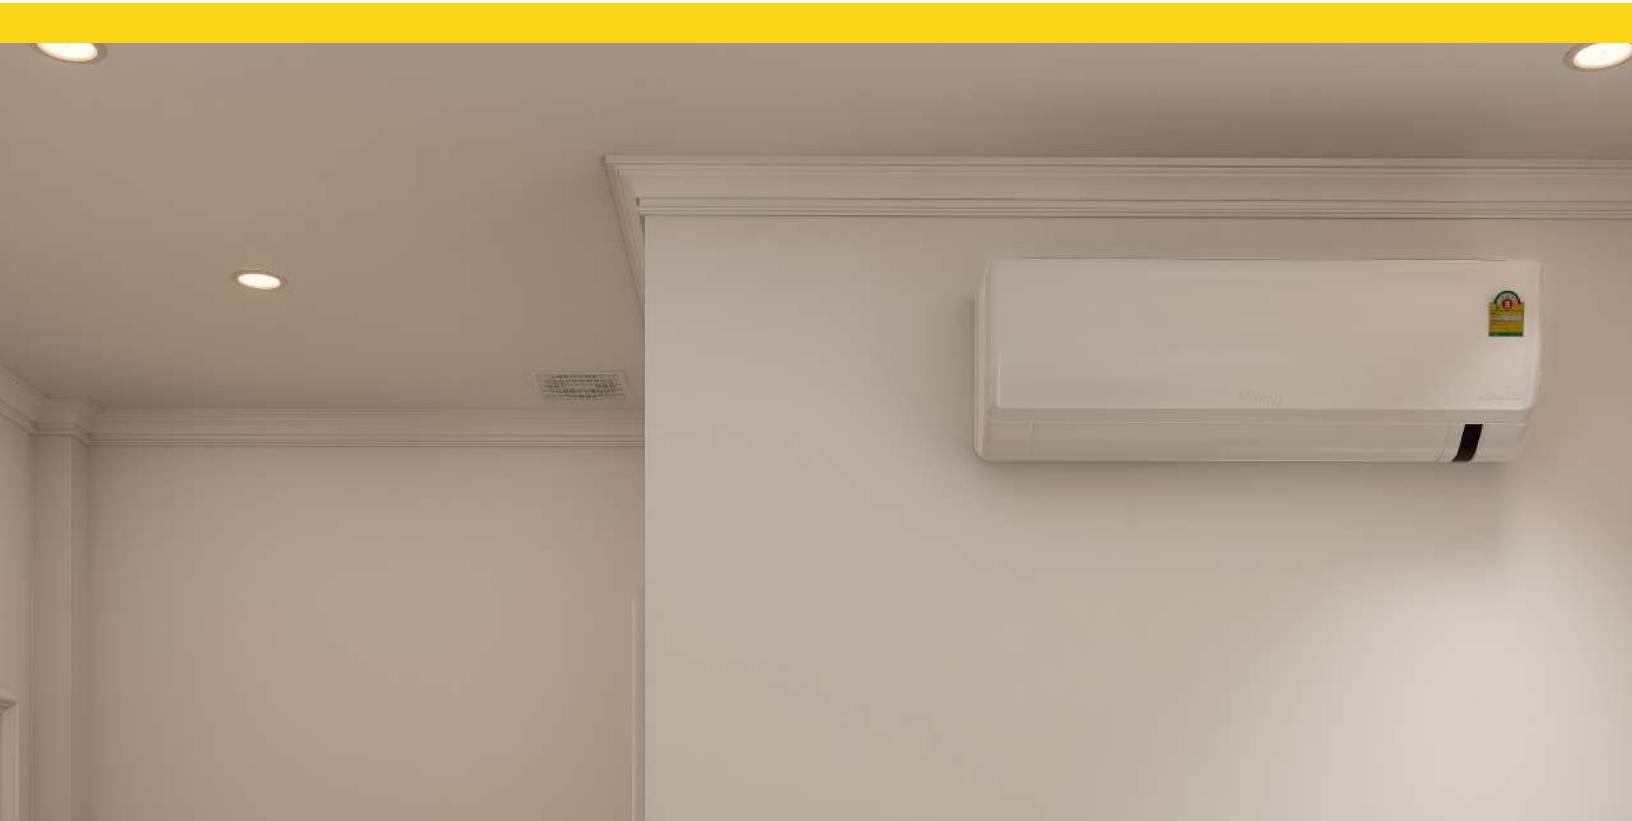

THE MEASURE OF A PRO™

VOLTAGE PROTECTOR

SXIM-SP-06

SXIM-SP-07



PROTECTION FUNCTION

- Over / Under Voltage Protection.
- Phosphor copper parts.
- Flame retardant shell.

COMMON USES

Refrigerators, TV's, freezers, washing machines, water coolers, computers, coffee makers.

A/C up to 18,000 BTU (120V model)

A/C up to 30,000 BTU (220V model)

ADDITIONAL FEATURES

- Power ON/OFF switch
- Easy installation design
- Space-saving format.

AVAILABLE OPTIONS:

SXIM-SP-06

SXIM-SP-07

PERFORMANCE PARAMETER

Finish: White

Packing: Blister

ENERGY INFORMATION

SXIM-SP-06

SXIM-SP-07

Voltage:

120V

220V

Frequency:

50/60Hz

50/60Hz

Current:

15A

20A

Under voltage:

90V

165V


Over voltage:

145V

260V

Delay Time:

3 Minutes (By-Pass)

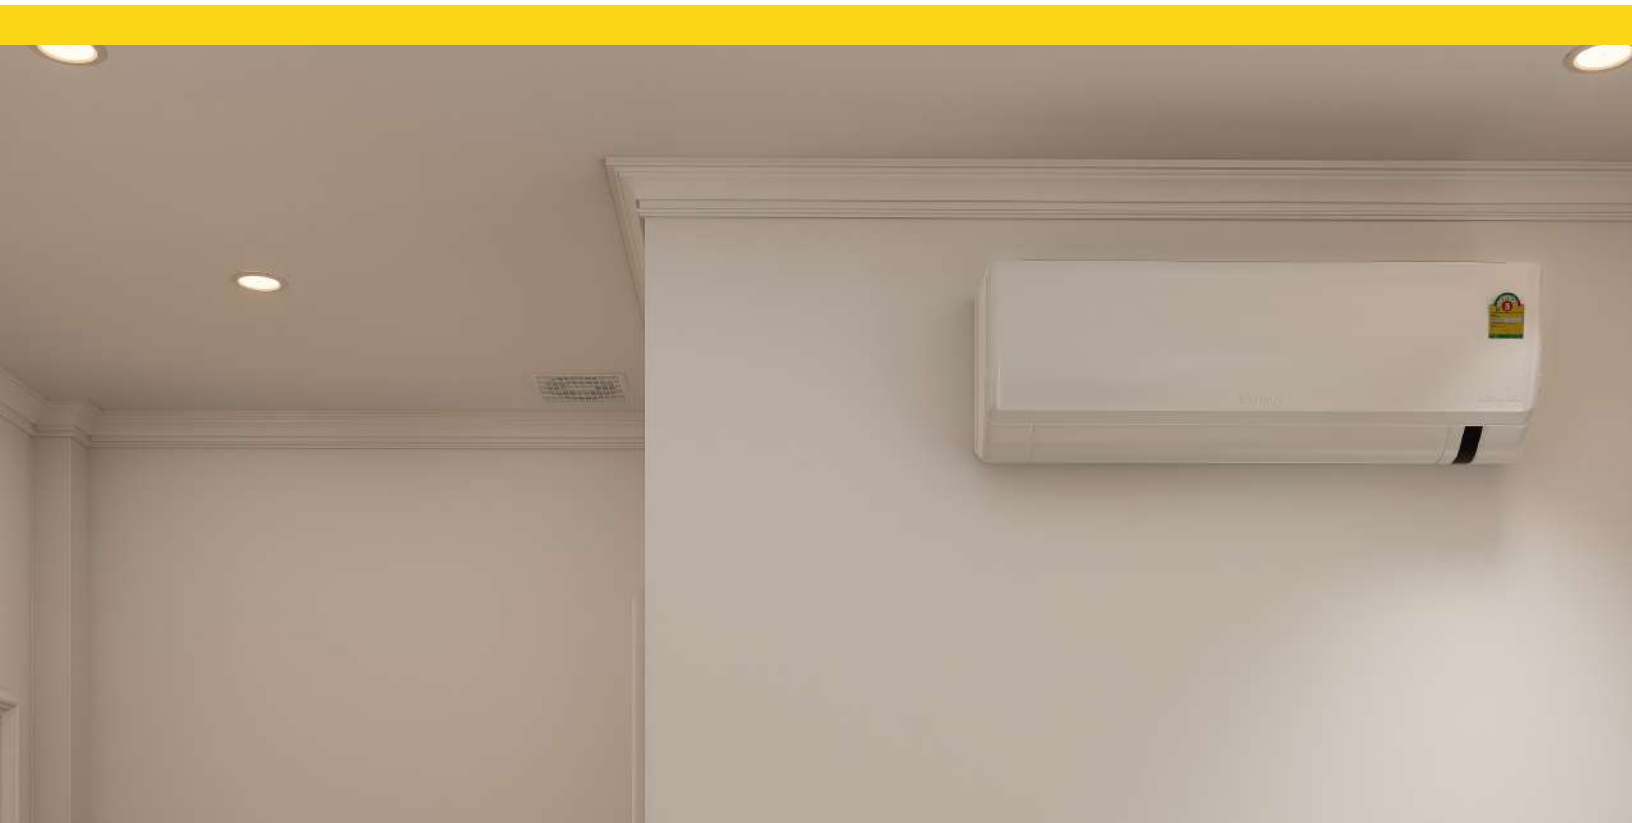

THE MEASURE OF A PRO™

SURGE PROTECTOR WITH MECHANICAL TIMER

SXIM-SP-08




PROTECTION FUNCTION

- Over / Under Voltage Protection.
- Lighting Protection.
- Phosphor copper parts.
- Flame retardant shell.

COMMON USES

Refrigerators, TV's, freezers, washing machines, water cooler, computers, coffee makers, microwaves, electric stoves, and multiple electronic devices.

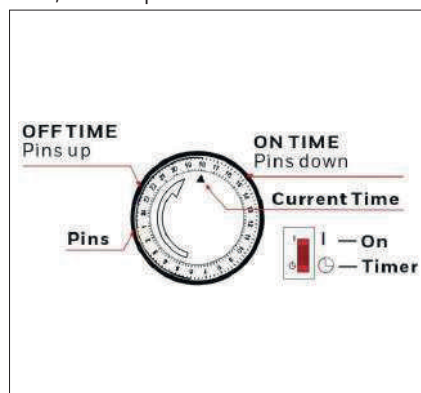

AVAILABLE OPTIONS:

SXIM-SP-08

PERFORMANCE PARAMETER

Finish: White
Packing: Blister

ENERGY INFORMATION

Voltage: 120V
Frequency: 50/60Hz
Current: 15A
Max Loading: 1800W
Surge Protect: 350J
Time Setting: 24 Hours



THE MEASURE OF A PRO™

VOLTAGE & SURGE PROTECTOR

SXIM-SP-10




PROTECTION FUNCTION

- Over / Under Voltage Protection.
- Phosphor copper parts.
- Flame retardant shell.
- Delay time is 30s.

COMMON USES

A/C up to 18,000BTU, refrigerators, TV's, freezers, washing machines, water cooler, computers, coffee makers, microwaves, electric stoves, and multiple electronic devices.

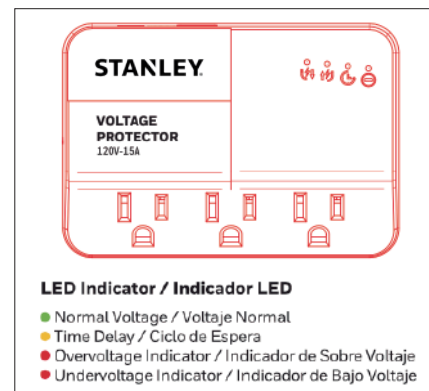

AVAILABLE OPTIONS:

SXIM-SP-10

PERFORMANCE PARAMETER

Finish: Black
Packing: Blister
Delay Time: 30s

ENERGY INFORMATION

Voltage: 120V
Frequency: 50/60Hz
Current: 15A
Surge Protection: 140J
Max Loading: 1800W
Under voltage: 90V
Over voltage: 140V



THE MEASURE OF A PRO™

STANLEY®



SOLAR LIGHTING

LED FLOODLIGHT SOLAR

FATMAX®

SXIMSFL01



Outdoor

LED luminaire for street and outdoor lighting, modern and compact design, uniform light projection, high efficiency, long life and easy installation, reduces energy consumption and maintenance costs.

FEATURES

- Heavy Duty Die Cast aluminum housing with ample heat sinking.
- Adjustable LED fixture with bracket (0–180°)
- LED fixture whit bracket can adjustable in 0-270 degrees.
- IP65 / IK06 rated
- Long operating time with reliable all-night performance
- Excellent performance in rainy or overcast conditions
- High brightness output
- Long lifespan

APPLICATION

- Park
- Square
- Trails
- Residential buildings
- Parking lot
- Bridges

Using a Stanley-approved battery provides the following benefits:

- Longer runtime (The light operates reliably throughout the night.)
- Better performance in rainy or overcast conditions
- Higher brightness capability
- Longer lifespan – Reduced deep discharges help extend overall battery life.
- More stable and consistent operation.

CE IP65



SPECIFICATIONS

Model	Power	Lumen	Solar Panel	Charging Time	Battery Power
SXIMSFL01-25W3K	25 W	162 Lm/W	8W / 6V	5 Hrs	6000 mAh
SXIMSFL01-25W6K	25 W	162 Lm/W	8W / 6V	5 Hrs	6000 mAh
SXIMSF-01-60W6K	60 W	162 Lm/W	18W / 6V	6Hrs	21 000 mAh
SXIMSFL01100W6K	100 W	162 Lm/W	28W / 9V	5Hrs	24 000 mAh
SXIMSFL01200W3K	200 W	162 Lm/W	35W / 9V	4 Hrs	30 000 mAh
SXIMSFL01300W6K	300 W	162 Lm/W	35W / 9V	5 Hrs	36 000 mAh

OPTICAL DATA

Color Temperature (CCT)	3000K or 6000K
Beam Angle	110°
Type of Distribution	Direct Symmetrical
Life Span	50 000 H

PHYSICAL DATA


Finish	Grey
Protection Level - IP	IP65
Body Frame	Aluminum+ ABS
Optical Material	Diffuser PC
Operation Temperature	0°C to +50°C

ELECTRICAL DATA


Control Remote Included	YES
Rechargeable battery	LiFeP04
RA	70
Dimmable	NO

DIMENSIONS

Model	Size (LxWxH)
SXIMSFL01-25W3K	163x50x185mm
SXIMSFL01-25W6K	163x50x185mm
SXIMSFL01-60W6K	204x55x237mm
SXIMSFL01100W6K	250x55x290mm
SXIMSFL01200W6K	250x55x290mm
SXIMSFL01300W6K	250x55x290mm



LUMINOUS INTENSITY DISTRIBUTION



THE MEASURE OF A PRO™

SOLAR LED OUTDOOR LIGHT

FATMAX®

SXIMSST01

Pole Included



Solar LED lighting, unified structure that includes LED luminaire, solar panel, lithium battery. This new solar technology offers a sustainable, with a minimum of investment and maintenance by not requiring electrical point or be connected to the network.

FEATURES

- Heavy-duty ABS + PC construction, anti-UV, 94V2 fire-resistant
- Long working time; the light can reliably stay on throughout the night
- Excellent performance on rainy or overcast days
- High brightness output
- Long lifespan Li-ion battery

APPLICATION

- Residential
- Park
- Square
- Parking Lot
- Public or Private roads
- And other places lighting.

Using a Stanley-approved battery provides the following benefits:

- Longer runtime (The light operates reliably throughout the night.)
- Better performance in rainy or overcast conditions
- Higher brightness capability
- Longer lifespan – Reduced deep discharges help extend overall battery life.
- More stable and consistent operation.



Solar
Panel



PIR
Sensors



Water
Proof



Save Money



Life Span
50,000 H

SPECIFICATIONS

Model	Power	Lumen	Solar Panel	Charging Time	Battery Power
SXIMSST01-50W6K	50 W	170 Lm/W	7W / 6V	12 Hrs	48WH
SXIMSST01-70W6K	70 W	170 Lm/W	9W / 6V	12 Hrs	67.2WH
SXIMSST01-100W6	100 W	170 Lm/W	12W / 6V	12 Hrs	96WH
SXIMSST01-150W6	150 W	170 Lm/W	22W / 6V	10 Hrs	96WH

OPTICAL DATA

Color Temperature (CCT)	6000 K
Beam Angle	55°
Type of Distribution	Direct Symmetrical
Life Span	50 000 H

PHYSICAL DATA

Finish	Black
Protection Level - IP	IP65
Body Frame	ABS + PC
Optical Material	Diffuser PC
Operation Temperature	-20°C to +50°C

ELECTRICAL DATA

Control Remote Included	YES
Rechargeable battery	LiFeP04
RA	70
Dimmable	NO


DIMENSIONS

Model	Size (LxWxH)
SXIMSST01-50W6K	385x258x65mm
SXIMSST01-70W6K	460x258x65mm
SXIMSST01-100W6	616x270x65mm
SXIMSST01-150W6	778x270x65mm

Installation Pole



LUMINOUS INTENSITY DISTRIBUTION

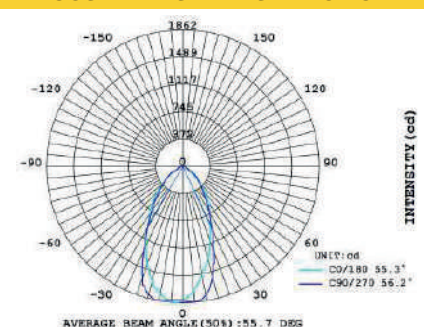


THE MEASURE OF A PRO™

SOLAR LED OUTDOOR LIGHT


SXIMSST01

SPECIFICATIONS

Model	Rating	Photovoltaic Panel
SXIMSST01-50W6K	DC3.2V 3AH*5 13W	6V 7W Monocrystalline
SXIMSST01-70W6K	DC3.2V 3AH*7 16W	6V 9W Monocrystalline
SXIMSST01-100W6	DC3.2V 3AH*10 27W	6V 12W Monocrystalline
SXIMSST01-150W6	DC3.2V 3AH*10 40W	6V 22W Monocrystalline

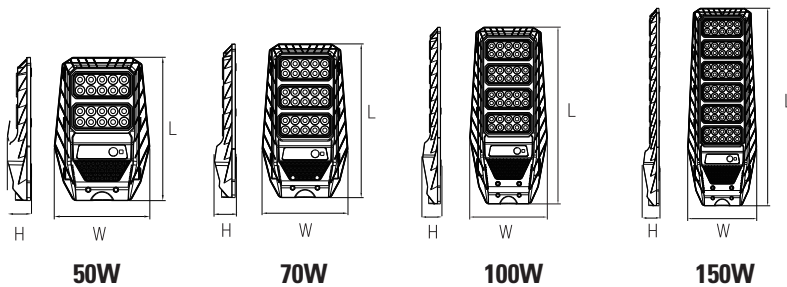

REMOTE CONTROL

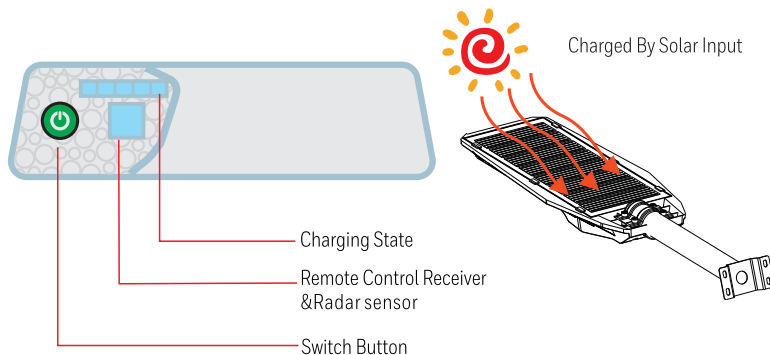


NOTE :


Charge the solar lights outdoor for 6-8 hours under the sunshine before first use.

RED : Battery Charging

GREEN : Battery Full

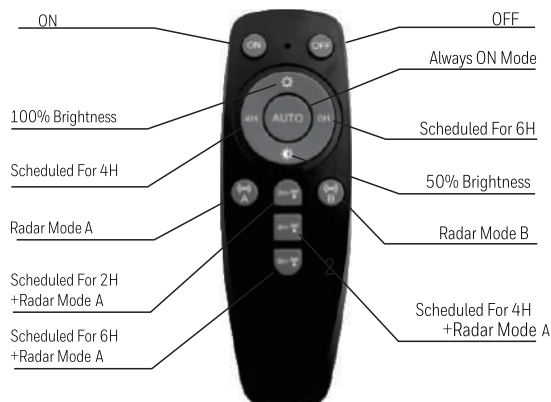


WORKING MODES

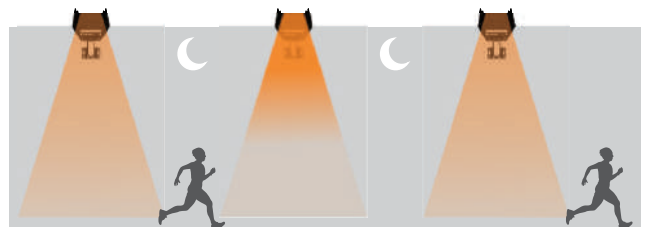


Mode 1: Radar Mode A

The lamp remains off during the daytime. At night, it stays at low brightness when no motion is detected. When motion is detected, the lamp switches to full brightness. Once the person leaves the radar sensor detection range, the lamp remains at full brightness for 15 seconds, then automatically returns to low brightness until dawn, when it turns off.

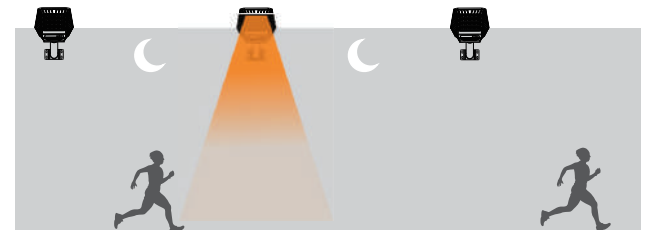

Mode 2: Radar Mode A

The lamp remains off during the daytime and stays off at night when no motion is detected. When motion is detected at night, the lamp switches to full brightness. Once the person leaves the radar sensor detection range, the lamp remains at full brightness for 15 seconds, then automatically turns off until dawn.

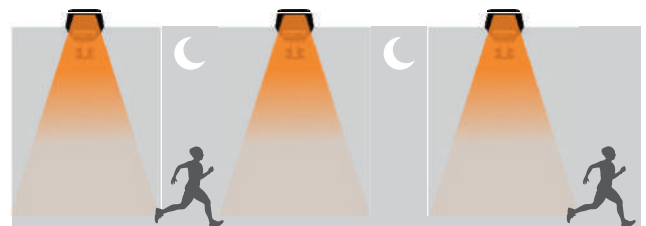

Mode 3: Always - On Mode

The lamp remains off during the daytime and stays at full brightness throughout the night. The radar sensor is disabled in this mode at night.

STANLEY®



INDUSTRIAL FANS

©2025 Stanley Black & Decker, Inc. Stanley® and the Stanley/ logo are trademarks of Stanley Black & Decker, Inc. or an affiliate thereof and are used under license. Manufactured by Home Products Group S.A., Hunkins Waterfront Plaza, Suite 556, Main Street, Charlestown, Nevis. official licensee of this product.

56" / 142.24cm CEILING FANS

¡NEW!

STXELHGB1989

5 SPEED SETTINGS
for personalized
experience


WALL CONTROL

3 METAL BLADES
for an enjoyable experience



METAL BLADES

It offers maximum safety, easy maintenance and compatibility with outdoor applications.

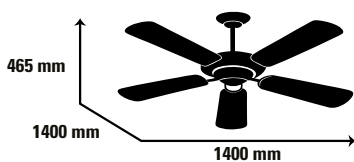

100% COPPER WIRE MOTOR

Energy efficient operation, precise speed control for customized comfort.

68 dB NOISE LEVEL

Low noise level for quiet operation.



SPECIFICATIONS

Model No.	STXELHGB1989
Controller	Wall Control
No. of Blades	3
No. of Speeds	5
Blade Material	Metal
Motor Material	Copper
Voltage	120V~
Frequency	60Hz
Power	65W
Motor Type	AC
Wind Speed (m/min)	90
Noise (dB)	68
Product Measurement (mm)	1400x1400x435
Net Weights (kgs)	5
Container Load 20'GP/40'H	670pcs / 1444pcs
Certification	NOM
UPC Code	810073479395

THE MEASURE OF A PRO™

STANLEY®

56" / 142.24cm CEILING FANS

¡NEW!

STXELHGW1989

5 SPEED SETTINGS
for personalized
experience


WALL CONTROL

3 METAL BLADES
for an enjoyable experience



METAL BLADES

It offers maximum safety, easy maintenance and compatibility with outdoor applications.

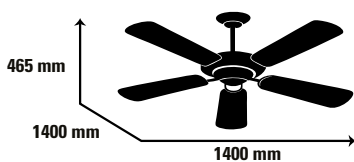

100% COPPER WIRE MOTOR

Energy efficient operation, precise speed control for customized comfort.

68 dB NOISE LEVEL

Low noise level for quiet operation.



SPECIFICATIONS

Model No.	STXELHGW1989
Controller	Wall Control
No. of Blades	3
No. of Speeds	5
Blade Material	Metal
Motor Material	Copper
Voltage	120V~
Frequency	60Hz
Power	65W
Motor Type	AC
Wind Speed (m/min)	90
Noise (dB)	68
Product Measurement (mm)	1400x1400x435
Net Weights (kgs)	5
Container Load 20'GP/40'H	670pcs / 1444pcs
Certification	NOM
UPC Code	810073478992

THE MEASURE OF A PRO™

STANLEY®



GENERATORS

©2025 Stanley Black & Decker, Inc. Stanley® and the Stanley/ logo are trademarks of Stanley Black & Decker, Inc. or an affiliate thereof and are used under license. Manufactured by Home Products Group S.A., Hunkins Waterfront Plaza, Suite 556, Main Street, Charlestown, Nevis. official licensee of this product.

INVERTER Power generator 2000W

¡NEW!

STXGIHG20G

FUEL TANK

5L fuel capacity for extended runtime.

CONTROL PANEL

Easy to use panel with waterproof plug protectors

SAFETY

Overload and low oil cut-out protection



HANDLE

Ergonomic handle for comfortable carrying.

Smooth, scratch-resistant finish on a weather-resistant material



SPECIFICATIONS

Model No.	STXGIHG20G
Rated output power	1,800W
Maximum starting output wattage	2,000W
Engine type	four stroke, air-cooled, ignition by spark plug.
Engine displacement CC	79
Motor Power	2.5 HP
Starting mode	Recoil
USB-C Port	YES
Parallel Function	YES
Parallel Function cables	YES
E Start + battery	NO
Fuel tank capacity	5 L
ECO Mode	YES
CO alarm	YES
Low oil alarm	YES
Overload alarm	YES
Output indicator	YES
Restart function	YES
Fuel indicator	YES
Net weight (kgs):	21
Dimension (mm) (L x W x H):	500x300x460
Container loading: 20'GP/ 40'HQ	308pcs / 770pcs
UPC code	810073476974

EASY ONE PULL START

High work efficiency.

LOW NOISE OPERATION

57dB @ 7m.

LONG LIFESPAN

Durability of 600 hours.

FUEL EFFICIENCY

Low fuel consumption.



THE MEASURE OF A PRO™

INVERTER Power generator 3500W

¡NEW!

STXGIHG32G

FUEL TANK

8L fuel capacity for extended runtime.

CONTROL PANEL

Easy to use panel with waterproof plug protectors

SAFETY

Overload and low oil cut-out protection

HANDLE

Ergonomic handle for comfortable carrying.

Smooth, scratch-resistant finish on a weather-resistant material



EASY ONE PULL START

High work efficiency.

EXCLUSIVE MOTOR DESIGN

New design, low speed rating.

LOW NOISE OPERATION

57dB @ 7m.

FUEL EFFICIENCY

Low fuel consumption.

SPECIFICATIONS

Model No.	STXGIHG32G
Rated output power	3,200W
Maximum starting output wattage	3,500W
Engine type	four stroke, air-cooled, ignition by spark plug.
Engine displacement CC	163
Motor Power	6 HP
Starting mode	Recoil
USB-C Port	YES
Parallel Function	YES
Parallel Function cables	YES
E Start + battery	NO
Fuel tank capacity	8 L
ECO Mode	YES
CO alarm	YES
Low oil alarm	YES
Overload alarm	YES
Output indicator	YES
Restart function	YES
Fuel indicator	YES
Net weight (kgs):	26
Dimension (mm) (L x W x H):	555x320x500
Container loading: 20'GP/ 40'HQ	165pcs / 444pcs
UPC code	810073476967

THE MEASURE OF A PRO™

Portable energy generator **3000W**

¡NEW!

STXGGHG30G

LARGER FUEL TANK

Large capacity 15 L
fuel tank for higher
performance

WHEELS AND HANDLE:

Large wheels and
a folding handle
for easy transport.



Easy to use panel
with waterproof
plug protectors



SPECIFICATIONS

Model No.	STXGGHG30G
Rated output power	2,800W
Maximum starting output wattage	3,000W
Engine type	Four stroke, air-cooled, spark-ignition.
Engine displacement CC	212
Motor Power	7 HP
Starting mode	Recoil
ATS function	NO
CO alarm	YES
Noise (dB)	74
Electric start	NO
Wheels and handle	INCLUDED
3 in 1 digital meter	INCLUDED
Battery	NO
VFT	YES
Volume of oil	0.6 L
Fuel tank capacity	15 L
Net Weight (kgs):	41.5
Dimension (mm) (L x W x H):	620x570x515
Container loading: 20'GP/ 40'HQ	180pcs / 470pcs
UPC code	810073476998

EASY ONE PULL START

High work efficiency.

COMMERCIAL GRADE ALTERNATOR

100% copper design.

LONG LIFESPAN

Durability of 600 hours.

FUEL EFFICIENCY

Low fuel consumption.

THE MEASURE OF A PRO™

Portable energy generator **3800W**

¡NEW!

STXGGHG38G

Closing Sensor
SECURITYCO

Easy to use panel
with waterproof
plug protectors

**LARGER
FUEL TANK**
Large capacity 15 L
fuel tank for higher
performance

WHEELS AND HANDLE:
Large wheels and
a folding handle
for easy transport.



EASY ONE PULL START

High work efficiency.

COMMERCIAL GRADE ALTERNATOR

100% copper design.

LONG LIFESPAN

Durability of 600 hours.

FUEL EFFICIENCY

Low fuel consumption.

SPECIFICATIONS

Model No.	STXGGHG38G
Rated output power	3,500W
Maximum starting output wattage	3,800W
Engine type	Four stroke, air-cooled, spark-ignition.
Engine displacement CC	223
Motor Power	8 HP
Starting mode	Recoil
ATS function	NO
CO alarm	YES
Noise (dB)	74
Electric start	NO
Wheels and handle	INCLUDED
3 in 1 digital meter	INCLUDED
Battery	NO
VFT	YES
Volume of oil	0.6 L
Fuel tank capacity	15 L
Net Weight (kgs):	48
Dimension (mm) (L x W x H):	620x570x515
Container loading: 20'GP/ 40'HQ	180pcs / 470pcs
UPC code	810073477001

THE MEASURE OF A PRO™

Portable energy generator 6000W

¡NEW!

STXGGHG60G

Closing Sensor
SECURITYCO

**LARGER
FUEL TANK**
Large capacity 25 L
fuel tank for higher
performance

Easy to use panel
with waterproof
plug protectors

WHEELS AND HANDLE:
Large wheels and
a folding handle
for easy transport.



EASY ONE PULL START

High work efficiency.

COMMERCIAL GRADE ALTERNATOR

100% copper design.

LONG LIFESPAN

Durability of 600 hours.

FUEL EFFICIENCY

Low fuel consumption.

SPECIFICATIONS

Mode No.	STXGGHG60G
Rated output power	5,500W
Maximum starting output wattage	6,000W
Engine type	Four stroke, air-cooled, spark-ignition.
Engine displacement CC	420
Motor Power	15 HP
Starting mode	Recoil / Electric Start
ATS function	NO
CO alarm	YES
Noise (dB)	76
Electric start	INCLUDED
Wheels and handle	INCLUDED
3 in 1 digital meter	INCLUDED
Battery	INCLUDED
VFT	YES
Volume of oil	1.1 L
Fuel tank capacity	25 L
Net Weight (kgs):	77
Dimension (mm) (L x W x H):	724x666x623
Container loading: 20'GP/ 40'HQ	128pcs / 264pcs
UPC code	810073477018

THE MEASURE OF A PRO™

Portable energy generator 8500W

¡NUEVO!

STXGGHG85G

Closing Sensor
SECURITYCO

WHEELS AND HANDLE:
Large wheels and
a folding handle
for easy transport.

**LARGER
FUEL TANK**
Large capacity 25 L
fuel tank for higher
performance

Easy to use panel
with waterproof
plug protectors



EASY ONE PULL START
High work efficiency.

COMMERCIAL GRADE ALTERNATOR
100% copper design.

LONG LIFESPAN
Durability of 600 hours.

FUEL EFFICIENCY
Low fuel consumption.

SPECIFICATIONS

Model No.	STXGGHG85G
Rated output power	8,000W
Maximum starting output wattage	8,500W
Engine type	Four stroke, air-cooled, spark-ignition.
Engine displacement CC	459
Motor Power	18 HP
Starting mode	Recoil / Electric Start
ATS function	NO
CO alarm	YES
Noise (dB)	76
Electric start	INCLUDED
Wheels and handle	INCLUDED
3 in 1 digital meter	INCLUDED
Battery	INCLUDED
VFT	YES
Volume of oil	1.1 L
Fuel tank capacity	25 L
Net Weight (kgs):	85
Dimension (mm) (L x W x H):	724x696x623
Container loading: 20'GP/ 40'HQ	128pcs / 264pcs
UPC code	810073477032

THE MEASURE OF A PRO™

STANLEY®



WATER HEATERS



©2025 Stanley Black & Decker, Inc. Stanley® and the Stanley/ logo are trademarks of Stanley Black & Decker, Inc. or an affiliate thereof and are used under license. Manufactured by Home Products Group S.A., Hunkins Waterfront Plaza, Suite 556, Main Street, Charlestown, Nevis. official licensee of this product.

ELECTRIC WATER HEATER TANKLESS 13kW

¡NEW!

STXEWHGW21393

Stainless steel
heating element and valves.

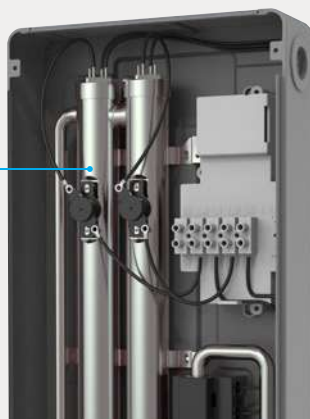

WUHU



DIGITAL TEMPERATURE CONTROL

Large touch screen and intuitive, simple operation.

PRESET TEMPERATURE MEMORY

With a single click, select the exclusive temperature for mode I or mode II for you and your family.

ELECTRICAL INSULATION PROTECTION

Prevents current leakage into the water or the housing, ensuring user safety.

OVERPRESSURE PROTECTION

Prevent accidents when the internal pressure of the tank exceeds safe operating levels.

IP25 PROTECTION

SPECIFICATIONS

Model	STXEWHGW21393
Rated power	13kW
Rated voltage	220V
Frequency	60Hz
Hot water temperature setting range	60°C
Active water flow	1.136 L/min
Heating element material	Stainless steel
Housing material	Rolled steel
Inner Tank Material	Copper
Outer Cover Material	SPCC
Working pressure	1MPa
Resistance rating	IPX0
No. of Bathrooms	Shower (1) Sinks (2)
Net Weight	4.0 kg
Product Dimensions	430x213x92 mm
Packaging Dimensions	478x266x140 mm
Master Carton Dimensions (4pcs)	575x490x280 mm


THE MEASURE OF A PRO™

ELECTRIC WATER HEATER TANKLESS 9kW

¡NEW!

STXEWHGW21394

Water and electricity separation

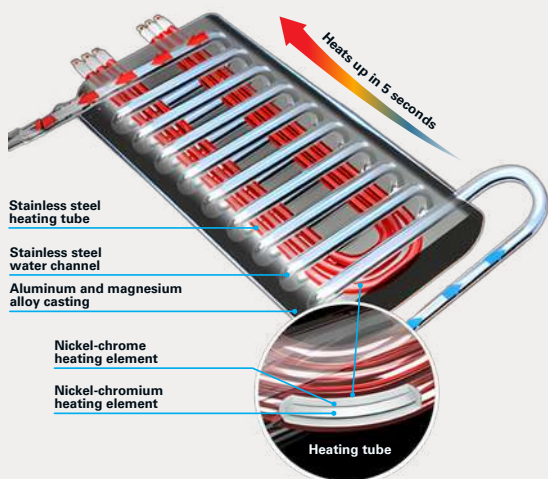

SHUNDE



DIGITAL TEMPERATURE CONTROL

Large touch screen and intuitive, simple operation.

PROTECTION AGAINST BURNS

Hot water scald prevention system, via an efficient thermostatic mixing valve.

ELECTRICAL INSULATION PROTECTION

Prevents current leakage into the water or the housing, ensuring user safety.

OVERPRESSURE PROTECTION

Prevent accidents when the internal pressure of the tank exceeds safe operating levels.

IP25 PROTECTION

SPECIFICATIONS

Model	STXEWHGW21394
Rated power	9kW
Rated voltage	220V~
Frequency	60Hz
Hot water temperature setting range	30° - 55°C
Active water flow	2.0 L/min. mm
Heating element material	Cast aluminum
Housing material	ABS
Working pressure	0.02-0.6 MPa
Resistance rating	IP25
No. of Bathrooms	Shower (1) Sinks (2)
Net Weight	2.6 kg
Product Dimensions	400x255x83 mm
Packaging Dimensions (mm)	480x275x130 mm
UPC Code	810073479692

THE MEASURE OF A PRO™

STANLEY®

